



# Technical Service Bulletin

**Cobra Motorcycle Mfg.**

240 Uran street  
Hillsdale, MI 49242


(517) 437-9100 phone  
(517) 437-9101 fax

## TSB1011 CX65 CDI unit

2011 Cobra CX65's are now shipping with an ignition CDI unit that allows the static base timing to be set at the "zero" timing point in the cases as opposed to the earlier units that had to be set at  $-5^{\circ}$  retarded (CCW) from the "zero" timing point.

CDI units with a date code of 1110 (11/10, November 2010) or newer will require this advanced static timing. The date code is located at the upper right corner of the CDI unit which is located behind the front number plate.

**NOTE:** The date code is on the surface of the CDI unit that does NOT have the PVL sticker which means it is facing away from you when you pull the number plate off.

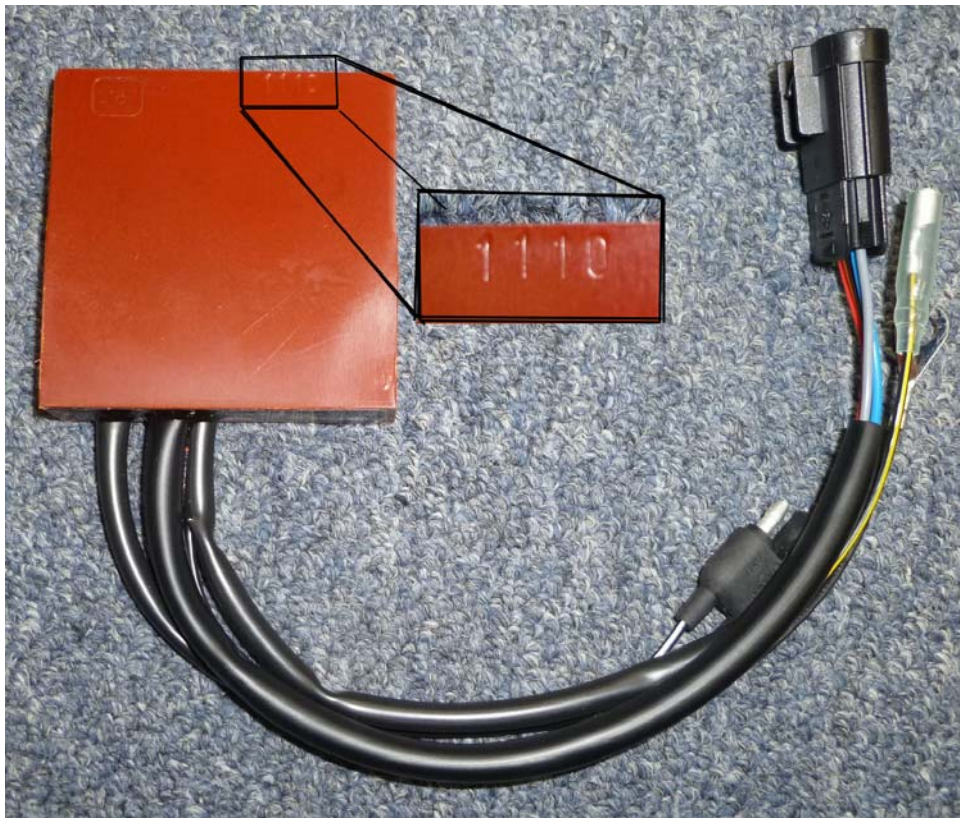



# Technical Service Bulletin

**Cobra Motorcycle Mfg.**

240 Uran street  
Hillsdale, MI 49242

(517) 437-9100 phone  
(517) 437-9101 fax

