Technical Service Bulletin

Cobra Motorcycle Mfg.
240 Uran Street
Hillsdale, MI 49242
(517) 437-9100 phone
(517) 437-9101 fax

TSB0706: 2006 King forks.

December 9, 2005

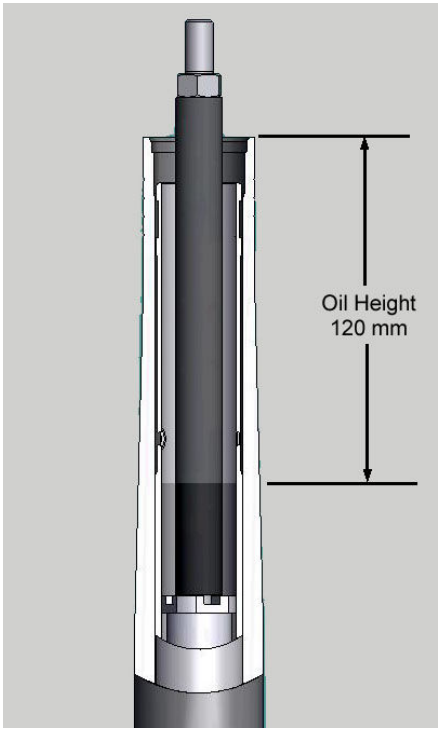

The fork oil in the 2006 King forks should be set at 120mm from the top edge of the outer tube with the forks collapsed down, spring removed, and damper rod down. Some units shipped early had too much fork oil.

When filling a dry fork leg, 120mm works out to be 107cc.

CAUTION
Too much fork oil can cause damage to fork tubes and components.

The bikes come stock with 7wt fork oil but some riders are opting to run 10 wt fork oil in one leg to slow down the movement.

Also, the light (0.23kg/mm) fork springs are being favored by many riders for a better ‘balanced’ feel.