DISCLAIMER OF WARRANTY

This motorcycle is sold "as is" with all faults, obvious or not. There are no warranties expressed or implied, including any warranty of merchantability and warranty of fitness for any particular purpose.

WARNING

THE COBRA CX50JR IS A COMPETITION MODEL ONLY AND IS <u>NOT</u> MANUFACTURED FOR, NOR SHOULD IT BE USED ON PUBLIC STREETS, ROADS OR HIGHWAYS.

THE USE OF THIS BIKE SHOULD BE LIMITED TO PARTICIPATION IN SANCTIONED COMPETITION EVENTS UPON A CLOSED COURSE BY A SUFFICIENTLY SKILLED RIDER AND SHOULD NOT BE USED FOR GENERAL OFF-ROAD RECREATIONAL RIDING.

IMPROPER USE OF THIS MOTORCYCLE CAN CAUSE INJURY OR DEATH.

THIS BIKE IS INTENDED FOR EXPERIENCED RACERS ONLY AND NOT FOR BEGINNERS.

IT IS <u>YOUR RESPONSIBILITY</u> AS THE OWNER OF THIS COBRA MOTORCYCLE OR AS THE PARENT, OR LEGAL GUARDIAN OF THE OPERATOR, TO KEEP THIS COBRA MOTORCYCLE IN PROPER OPERATING CONDITION.

THIS BIKE WAS DESIGNED FOR RIDERS THAT WEIGH LESS THAN 80 LBS WITH FULL RIDING GEAR AND SHOULD NOT BE OPERATED BY RIDERS THAT WEIGH MORE.

BE SURE THAT THE RIDER ALWAYS WEARS ADEQUATE SAFETY GEAR EVERYTIME HE OR SHE RIDES THEIR COBRA MOTORCYCLE.

IMPORTANT SAFETY NOTICE

A WARNING

Failure to follow WARNING instructions <u>could result in severe injury or death</u> to the machine operator, a bystander, or a person inspecting or repairing the machine.

CAUTION:

A CAUTION indicates special precautions that must be taken to avoid damage to the machine.

NOTE: A NOTE provides key information to make procedures easier or clearer.

MCCJ2011.6

Table of Contents

General Information	4
Specifications - General	4
Specifications - Torque Values	5
Optional Components	5
Break-In Procedure	6
Starting Procedure	7
Maintenance	8
Tips	8
Schedule	9
Replacing Transmission / Clutch Lubricant	10
Proper Chain adjustment	11
Air Filter Cleaning	11
Fork Oil Replacement	12
Cobra Frictional Drive (CFD)	14
Parts	14
Parts – Airbox and Inlet System	15
Parts – Bars and Controls	16
Parts - Carburetor	17
Parts – Coolant System	18
Parts – Electrical System	19
Parts – Engine – Bottom End and Transmission	20
Parts – Engine Clutch and Kicker	21
Parts – Engine – Water Pump	22
Parts – Engine – Top End	23
Parts – Exhaust System	24
Parts – Forks & Triple Clamps	25
Parts – Forks – Leg Assembly – Brake Side	26
Parts – Forks – Leg Assembly – Non-Brake Side	27
Parts – Frame – Mounting Hardware I	28
Parts – Frame – Mounting Hardware II	29
Parts – Front Brakes	30
Parts – Front Wheel	31
Parts – Plastic & Seat	32

Parts – Rear Brake	33
Parts – Rear Wheel	34
Parts – Shock	35
Parts – Swingarm Assembly	36
Service	37
Engine Service	37
Base Gasket Selection	38
Engine Removal	39
Complete Engine Disassembly Procedure	40
Top End Disassembly Procedure	40
Splitting the Cases	41
Engine Assembly	42
Clutch	44
Clutch Removal:	46
Clutch Assembly:	49
Ignition	50
Cooling System	52
Radiator fluid removal:	52
Fuel & Air System	55
Carburetor	55
Reeds	56
Exhaust	57
Wheels & Tires	57
Rear wheel pullers	57
Tuning	58
Clutch	58
Gearing	60
Suspension	61
Rear shock	63
Front Forks	63
Carburetion	63
Troubleshooting	66
Index	68

General Information

Specifications - General

Items	CX50 JR
Dimensions	
Wheelbase	35.75" (908mm)
Wheel size	10" (254mm)
Seat height	23.9" (607 mm)
Engine	
Type	2-stroke, single cylinder, reed valve
Cooling system	Liquid-cooled
Coolant	50/50 antifreeze-coolant / distilled water
Displacement	49.8 cc
Bore and stroke	39 mm x 41.7 mm
Ignition system	Electronic, analogic advance
Spark plug	Champion 8339-1, 8332-1 hotter, 8904-1 colder
Gap	0.023" - 0.025" (0.58 - 0.64 mm)
Ignition timing	0.035" (0.9 mm) Before Top Dead Center (BTDC)
Fuel type	High octane <u>pump</u> gasoline
Premix Oil type	Motul 800 2T Off Road
Premix oil ratio after break-in	Motul 800 2T Off Road, 50:1 to 63:1
Carburetion	All other premix oil at 32:1 to 40:1 14 mm Dell'Orto
Slow (Pilot) Jet / Main Jet	55 / 92
Float Height	16mm ± 0.5mm (0.63" ± 0.020")
Transmission	16111111 <u>+</u> 616111111 (6166 <u>+</u> 61626)
Speed / Clutch	Single / Cobra 3 shoe
Final drive ratio	13/37T or 14/38 T
Chain	420
Transmission / clutch oil type	Cobra Venom 3 Shoe Clutch Milk
Quantity	235 – 350 ml (8 – 12oz)
Chassis	
Front tire	2.50 – 10
Pressure	15 psi minimum
Rear tire	2.75 – 10
Pressure	15 psi min. (20 psi for hard pack or rocky conditions)
Front fork	Cobra 30mm USD
Fork oil type	SAE 20 weight
Fork oil Left (brake) side	120 ml (4.0oz)
Fork oil Right side	60 ml (2.0oz)

Specifications - Torque Values

Fastener	Torque Valu	Size & Remarks		
. 6.6161161	ft-lb	in-lb	Nm	Size & Remarks
Cylinder head nuts	8.8	105	12	M6 X 1.0
Crankcase bolts	8.8	105	12	M6 x 1.0
Spark plug	(SP)	(SP)	(SP)	M14 x 1.25
Stator bolts	2.1	25	2.8	M5 X 0.8**
Stator cover bolts	1.7	20	2.3	M4 X 0.75
Clutch cover bolts	5.8	70	7.9	M6 X 1.0
Clutch nut	40	480	54	10 x 1.25*
Clutch bolts	12	144	16	M6 x 1.0*
CFD nut	55	664	75	½" x 20 LHT*
Engine mount bolts	22	265	30	M8 X 1.25
Swingarm pivot	21	250	28	M14 X 2.0
Shock bolt	35	420	47	M10 x 1.5**
Triple clamp (top)	12	144	16	M8 x 1.25
Triple clamp (bottom)	6	72	8	M6 x 1.0
Water pump impeller	3.6	44	5	M5 x 0.8*
Intake manifold bolts	4.6	55	6.2	M6 X 1.0
Ignition rotor nut	33	400	45	M10 x 1.25*
Rear sprocket bolts	18	216	24	M7 X 1.0**
Axle nuts	25	300	34	M12 X 1.25

^{*} Apply high strength thread locking agent when installing.

(SP) To apply the proper torque to the spark plug when inserting, first screw the spark plug in until the metal gasket ring causes resistance and then turn another ½ turn.

Optional Components

Call your dealer, or the factory, for details

- Carburetor jets
- Sprockets
- Suspension Springs

Weight of Rider (lb)	Fork Spring	Shock Spring
Less than 38 (light)	KCCJ0018 (12 lb/in, 2.10 N/mm)	SCMUOH04 (275 lb/in) red
38 – 45 (std)	KCCJ0021 (14 lb/in, 2.45 N/mm)	SCMUOH05 (285 lb/in) yellow
46 to 55 (stiff)	KCCJ0025 (16 lb/in, 2.80 N/mm)	SCMUOH06 (295 lb/in) white

- Tall Seat (Not AMA Legal)
- Bar Risers
- Wide Foot pegs

^{**}Apply medium strength thread locking agent when installing.

Break-In Procedure

Your Cobra CX50 JR is a close-tolerance high performance machine and break-in time is very important for maximum life and performance. The CX50 JR can be ridden hard after the first ½ hour break-in time.

Cobra recommends *Motul 800 T2 Off Road* premix oil with high octane pump gas mixed at 50:1 (150 ml oil to 2 gallons of gas). Other brands of oil should be mixed at 32:1 for break-in.

CAUTION:

Failure to use proper fuel, oil, or fuel/oil mixture may result in premature engine wear or damage to the machine.

Adhering to the following break-in schedule will result in long lasting high performance machine.

- Start bike on stand
- First 5 minute period, operate the bike on the stand with a combination of idle and high RPM operation. (avoid prolonged high RPM but spin the rear wheel good at least once or twice per minute)
- Allow bike to cool
- Ride for 15 minutes maximum (avoid prolonged high RPM operation and avoid abusing the clutch with throttle blipping.
- Allow bike to cool and inspect bike for loose fasteners.
- Avoid prolonged operation at Wide Open Throttle for the next half hour.
- After 1 hour of operation
 - Check for loose bolts and nuts.
 - Clean the carburetor bowl.
 - Change the transmission / clutch lubricant.
- After 8 hours of operation
 - Change the fork oil.
 - Have a Certified Cobra Mechanic or suspension specialist change the shock oil.
- Your bike is now ready for the highest level of competition!

NOTE: During break-in the bike will likely lose some engine coolant through the radiator overflow hose. Losing up to 4 oz (120 ml) is normal. Proper coolant level will cover the top of the radiator cores. Removing the radiator cap and looking inside is the only way to check the coolant level.

A WARNING

Never remove the radiator cap of a machine that has a warm engine. Burning and scalding could occur.

Starting Procedure

Before starting the machine inspect the following:

- Tire pressure
- Chain tension
- Coolant level
- Proper wear on chain rollers and sliders
- Handlebar tightness
- Throttle assembly movement/cable adjustment
- Air Filter
- Check for loose nuts and bolts
- Turn the fuel on by rotating the fuel petcock knob to the vertically downward position (reserve position is horizontally forward)

NOTE: For best results from your Cobra Motorcycle use only the recommended fuel. Testing has shown that most 'race' fuels actually degrade performance.

A WARNING

Always wear a helmet and other protective riding gear.

When your pre-ride inspection is complete the bike may be started. For a cold engine follow this procedure.

- 1. Place the motorcycle on a stand of sufficient strength that positions the motorcycle in a level upright position with the rear wheel off the ground.
- 2. Pull up the choke knob and turn it to lock it.
- 3. Kick start the engine.
- 4. Rev the engine in short spurts, turning the throttle no more than 1/4 open until the engine will run without the choke.
- 5. Verify a functional engine shut-off switch by shutting off the engine.
- 6. Restart the engine and proceed with riding when the engine is sufficiently warm (i.e. the side of the cylinder is warm to touch).

CAUTION:

Never rev an engine full throttle until the engine is at operating temperature.

A WARNING

This is a high performance race motorcycle. Too much application of throttle will likely land your little racer on his or her arse. Fenders can be replaced but bruised egos and other body parts take longer.

CAUTION:

Make sure your riders' foot is not resting on the foot brake while they are riding.

Maintenance

A properly maintained machine is safer, faster, and more fun to ride.

Tips

- 1. Recommended lubricants:
 - Cobra Clutch Milk is by far the best auto clutch lubricant. It is a full synthetic lubricant that has been specifically formulated for Cobra's auto clutch and has;
 - Exceptional film strength over petroleum based oils or synthetic blends.
 - Extreme temperature tolerance.
 - NO frictional modifiers.
 - Dispersant package to keep clutch fibers in suspension so they can be flushed out when the oil is changed.
 - Extremely low viscosity for minimal drag and 'windage'.
 - b. *Motul 800 2T Off Road* oil is the recommended **premix oil** because:
 - Its Ester base leaves a film on all parts at all times. No metal to metal startups or corrosion potential.
 - Exception film strength over petroleum based oils or synthetic blends.
 - Easily atomizes and burns completely.
 - Does not fall out of suspension from premix in cold weather.
 - Produces virtually no coking deposits, leaving pistons, rings and heads extremely clean with minimal pipe 'spooge'.
- 2. Filling your transmission with more than 8.0 oz (235 cc) of lubricant will help to transfer heat from the clutch. Filling with more than 12 oz (295 cc) will degrade performance.
- 3. The cylinder base gasket has been 'fitted' for your engine. The code number stamped into the engine cases will guide you to what thickness base gasket is required during a common top end service. See the service section of this manual to correspond a code number with a base gasket part number.
- 4. Evaluate the bikes jetting only after it has been warmed up to race temperatures.
- 5. New chains will stretch on first use. Never install a new chain prior to a race. Always 'break' them in during practice.
- 6. Your Cobra motorcycle has a 10 digit VIN (Vehicle Identification Number). The first two digits indicate the model and the seventh indicates the model year (MY). Example, CMxxxx7xxx is a 2007 MY CX50 JR.
- 7. Because of the amount of heat generated by the clutch and engine during extended periods of riding, it is advisable to remove the ignition cover afterward to allow the ignition to cool off. The heat transfers through the cases and can damage the stator as it cools off because of lack of airflow around the stator.
- 8. If you ever need to weld anything on the bike, disconnect the spark plug cap, unplug the ignition, disconnect the kill switch, scrape the paint bare near the

area to be welded and put the ground clamp as close to the area to be welded as possible.

A WARNING

Be sure the fuel tank and carburetor have been removed and safely located away from the welding process.

- 9. The frame is 4130 Chrome Moly and it is important to weld it with the proper rod and heat settings set as light as possible. Cobra recommends replacing the frame with a new one if the old one becomes damaged. Use ER70S6 filler if welding on the frame.
- 10. If your kick-starter lever does not return properly, first try loosening the six kick/clutch cover screws ½ turn. Hold the kick lever ½ way down while retightening the six screws starting for the center and working out
- 11. Inspect CFD slip torque every 10 hours of riding.
- 12. Check proper clutch engagement before and after each ride. If the clutch is engaging properly DO NOT feel the need to take the clutch apart to; measure the spring stack, clean the stack, replace the springs, etc... Cobra has worked very hard to make a clutch that is low maintenance and so only take it apart if it NEEDS to be maintained.

Schedule

- Between each ride
 - Check that the air filter is cleaned and oiled.
 - o Insure the smooth operation of the throttle cable.
 - Check for frayed strands of the throttle cable inside the throttle housing.
 - Check for adequate tire pressure.
 - Check all nuts and bolts for proper torque.
 - o Spray all moving parts with WD40 or other light oil.
 - Check drive chain for
 - Proper tension.
 - Adequate lubrication.
 - Insure that the ignition stator and rotor are clean and dry.
 - Check the frame for cracks in the metal or cracks in the paint that might indicate that the metal has been stressed beyond it's safe limits.
 - Check the rims for signs of stress, like cracks around the rim, spokes and hub.
- Every 2 hours of operation
 - Replace the transmission oil.
- Every 10 hours of operation
 - o Replace the fork oil.
 - Have the shock oil replaced by a Certified Cobra Mechanic or a suspension specialist.

Replacing Transmission / Clutch Lubricant

Minimum of 235 ml (8 oz) *Cobra Venom 3 Shoe Clutch Milk* (Part # MCMUGF32). Up to 350ml (12 oz) can be applied without hurting performance.

Tools needed:

8mm allen wrench

Procedure:

- 1. Begin this procedure with a bike that has been ridden more than 5 minutes but less than 10 minutes.
- 2. Remove the oil drain plug, on the clutch cover, near the brake lever (figure 1).




Figure 1

- 3. Allow the oil to drain completely, then reinstall the oil drain plug.
- 4. Remove the oil fill plug and add 8.0oz of *Cobra Venom 3 Shoe Clutch Milk* thru the oil fill plug.

NOTE: Applying additional oil, up to 350 ml (12 oz), can help clutch life. More than 350 ml (12 oz) will degrade engine performance.

NOTE: It can be helpful to lean the bike over on its left side to add oil to the bike.

5. Reinstall the oil fill plug.

NOTE: Cobra has spent considerable time and money developing the proper lubrication to handle the harsh environment of the automatic clutch and transmission of this motorcycle. Cobra's specially developed *Cobra Venom 3 Shoe Clutch Milk* (Part # MCMUGF32) was formulated to provide superior lubrication and cooling capability over extended periods of time and is the recommended lubricant for your Cobra motorcycle.

Proper Chain adjustment

Tools required for chain adjustment

- 19 mm wrench or socket
- 13 mm wrench or socket
- 1. Make sure that the rear wheel is aligned properly.
- A properly adjusted chain will have 35mm (13/8") free movement behind the chain block with no load on the bike. (figure 2)




Figure 2

3. Sit on the bike and verify that the chain has a minimum of 12mm (1/2") free movement when the chain is at it's tightest point.



- If the chain requires adjusting, loosen the axle with a 19 mm wrench and tighten the chain by rotating the adjustor bolts clockwise (CW) or loosen the chain by rotating the adjustor bolts (CCW).
- 5. Retighten the axel bolt to 25 ft-lb (34 Nm).
- 6. Retighten the adjustor bolt

Air Filter Cleaning

Tools recommended for air filter maintenance:

- #2 Phillips head screwdriver
- 4 mm Allen wrench
- Foam filter oil

Procedure

- 1. Removed the seat with a 4 mm Allen wrench.
- 2. Remove the filter/air inlet boot from the back of the carburetor with a Phillips screwdriver
- 3. Pull the filter / boot assembly out the top of the air box.
- 4. Clean the filter in a nonflammable solvent to remove the filter oil.

A WARNING

Do not clean the air filter with gasoline or other highly volatile petroleum product. Diesel fuel or kerosene would be preferred but caution should still be taken. Hot soapy water works well.

- 5. Clean the filter in hot soapy water to remove all dirt particles.
- 6. Allow it to dry thoroughly.
- Saturate with filter oil and remove excess.

NOTE: The Cobra is equipped with a special designed Air box. It is very important to keep the air filter clean and properly oiled with high quality water-resistant foam filter oil. It's very important to oil your filter consistently each time because varied amounts of oil will change your carburetor jetting.

8. **Reinstall** the filter / boot assembly making sure the letters "CM" are visible between the carburetor and air box (figure 8).



Figure 8

NOTE: Make sure you change or clean your filter after each ride.

Fork Oil Replacement

Tools required

- Two 19 mm wrenches or sockets
- 4 & 5 mm hex key (Allen wrench)
- 25mm wrench or socket
- 20 wt fork oil

Disassembly procedure

- 1. Remove the front wheel (19 mm wrench).
- Remove the brake caliber from the fork leg (4 mm hex key).
- 3. Loosen the fork caps (25mm socket).
- 4. Remove the fork legs from the triple clamps (5 mm hex key).
- 5. One leg at a time
 - a. Remove the fork cap from the leg.
 - b. Separate the fork cap from the damper rod.
 - c. Pull out the fork spring.
 - d. Place upside down over a suitable pan, tray, or container.
 - e. Work the damper rod up and down several times.
 - f. Allow it to drain completely.

Assembly procedure

- 1. Fill the left (brake side) fork leg with 4.0oz (120 ml) 20 wt fork oil and fill the right (non brake side) fork leg with 2.0 oz (60 ml) 20 wt fork oil.
- 2. Measure the fork oil level to the top of the fork tube with the leg collapsed, and record for tuning purposes.
- 3. Install the fork spring.
- 4. Reconnect the damper rod to the fork cap (12 ft-lb, 16 Nm).

CAUTION:

The damper rod is hollow and will break if the nut is over tightened.

- 5. Reinstall the for cap into the fork leg (5 ft-lb, 6.7 Nm)
- 6. Reinstall the fork legs into the clamps (6 ft-lb, 8 Nm).
- 7. Reinstall the brake caliper.
- 1. Reinstall the front wheel (25 ft-lb, 34 Nm).

Cobra Frictional Drive (V3 CFD)

The Cobra Frictional Drive (CFD) is essentially an adjustable slip clutch that dissipates torque spikes transmitted from the rear wheel to the rest of the drive line and engine. Instead of these torque spikes potentially damaging internal components, the CFD allows the transmission to slip with respect to the engine. For this to occur, the CFD must function properly by 'slipping' above a minimum torque value.

The safe minimum slip torque of the CFD should be checked every 2 hours of operation.

The slip torque value should be above 60 ft-lb (81 Nm) measured at the sprocket.

To properly measure the minimum torque at which the CFD (Cobra Frictional Drive) slips

- 1. Access the slip clutch by draining the oil and removing the cover exposing the CFD.
- 2. Brace the CFD gear from turning with a suitable device (Cobra tool EAMU0004 or similar).
- 3. Install the Sprocket Socket CFD torque checking tool (MCMUTL15) on the sprocket and secure with the supplied screw and ensure that the tool is completely up against the sprocket
- Verify with a torque wrench applied to the Sprocket Socket that the V3 CFD does not slip below 81 Nm (60 ft-lb) in either direction.
- 5. If there is slippage below 81 Nm (60 ft-lb) remove the cotter pin and tighten the castle nut on the CFD one more position (it is a left hand thread nut so you must turn it counter clockwise)



CAUTION:

Do not check earlier versions of the CFD with this method! The torque valves required at the sprocket would be much higher

HINT:


This V3 CFD torque checking method is possible do to with the chain on. Just put the bike on a stand so that the rear wheel can turn freely.

HINT:

The CFD hubs can be removed with the universal puller (MCMUTL70).


Parts

Parts – Airbox and Inlet System

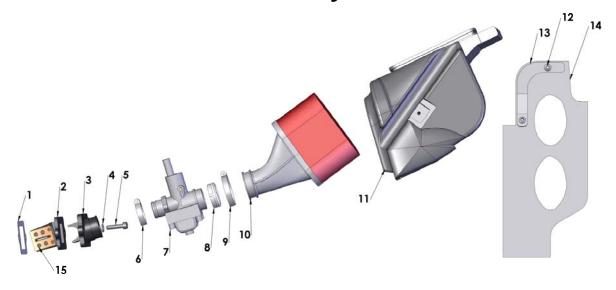


	Airbox and Inlet System				
REF #	PART#	DESCRIPTION			
1	ZCMU0132	GASKET – REED TO CYLINDER			
2	ECKG0202	REED BLOCK ASSEMBLY			
3	ECKG0203	INLET MANIFOLD			
4	HCWF0601	6 mm FLAT WASHER			
5	HCBC0625	M6X25mm SOCKET HEAD CAP SCREW			
6	MCKGHO04	HOSE CLAMP – CARBURETOR TO MANIFOLD			
7	RCCM0001	CARBURETOR 14mm			
8	RCCM1301	VELOCITY STACK			
9	MCKGHO01	HOSE CLAMP – AIR BOOT TO CARBURETOR			
10	RCMU0403	AIR FILTER WITH BOOT			
11	RCMU0405	AIR BOX – CM			
12	HCBB0612	M6X12mm BUTTON HEAD BOLT (2 REQ'D)			
13	RCMU1407	BRACKET – MUD FLAP			
14	RCMU0406	MUD FLAP – CM			
15	ECKG0205	REEDS REPLACEMENT			

Parts – Bars and Controls

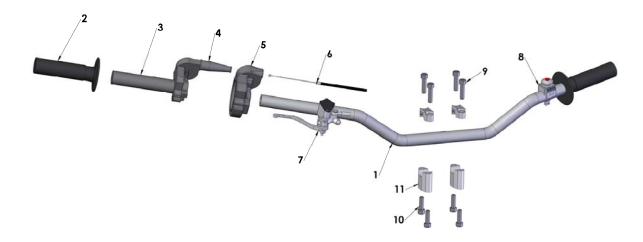

	Bars and Controls				
REF #	PART#	DESCRIPTION			
1	TCMU0019	HANDLEBAR - ALUMINUM			
2	TCMU0008	GRIPS (SET OF TWO) – SCOTT WAFFLE			
3	FCMU0066	THROTTLE ASSEMBLY			
4	FCPW0004	CABLE COVER			
5	FCMU0068	THROTTLE COVER			
6	FCMU0019	THROTTLE CABLE			
7	BAKG0003	BRAKE ASSEMBLY FRONT			
8	FCMU0033	KILL SWITCH ASSEMBLY			
9	HCBC0806	M8X30mm SOCKET HEAD CAP SCREW (4 REQ'D)			
10	HCBC1001	M10X45mm SOCKET HEAD CAP SCREW (2 REQ'D)			
11	TKMU0404	BAR MOUNT KIT, SHORT (1 REQ'D) STANDARD			
11A	TKMU0403	BAR MOUNT KIT, TALL (1 REQ'D)			
ACCESSORY	BCKG0023	ALLOY BRAKE LEVER W/BALL			
ACCESSORY	BCKG0024	BRAKE PERCH ASSY W/LEVER & BALL			
ACCESSORY	BCKG0004	SHIELDED BRAKE HOSE ASSEMBLY			


Parts - Carburetor

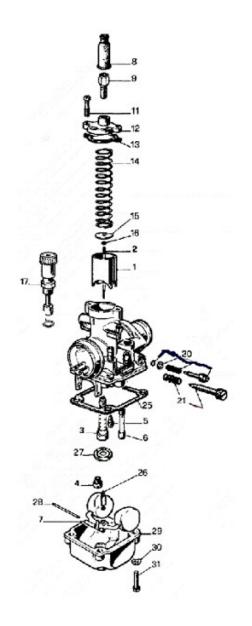

	Carburetor					
REF.#	PART#	DESCRIPTION				
	RCCM0001	COMPLETE CARBURETOR 14MM				
1	RCMU0305	CARB SLIDE				
2	RCMU0601	NEEDLE				
3	RCMU00	ATOMIZER AU2.62				
4	RCMU00xx	MAIN JET, xx denotes size				
5	RCMU00xx	PILOT JET, xx denotes size				
7	RCMU0301	FLOAT				
8	RCMU0102	RUBBER CABLE CAP SEAL				
9	RCMU0003	CABLE ADJUSTOR				
11	RCMU0006	TOP CARB SCREW				
12	RCMU0106	CARB TOP				
13	ZCMU0007	TOP CARB GASKET				
14	RCMU0004	SLIDE SPRING				
15	RCMU0028	NEEDLE RETAINER PLATE				
16	RCMU0007	NEEDLE CLIP				
17	RCMU0204	CHOKE ASSEMBLY				
NOT SHOWN	RCMU0209	O-RING CHOKE ASSEMBLY				
20	RCMU0009	FUEL MIXTURE SCREW				
21	RCMU0011	IDLE ADJUSTMENT SCREW				
25	RCMU0103	FLOAT BOWL GASKET				
26	RCMU0107	FLOAT NEEDLE				
27	RCMU0012	DIFFUSER				
28	RCMU0016	FLOAT RETAINER PIN				
29	RCMU0108	FLOAT BOWL				
30	HCWF0401	WASHER 4MM FLAT				
31	RCMU0201	BOTTOM FLOAT SCREW				
NOT SHOWN	RCCM1301	VELOCITY STACK – 05 style				
NOT SHOWN	RCCM0314	14MM CARB RESTRICTOR				
NOT SHOWN	FCMU0026	FUEL LINE 5"				
NOT SHOWN	MCMUCL04	HOSE CLAMPS – FUEL LINE				
NOT SHOWN	RCMU0022	CARB VENT HOSE 2" EACH				


PIL	OT JET		MAIN JET			MAIN JET			
48	RCMU0048		85	RCMU0085	92	RCMU0092	99	RCMU0099	
50	RCMU0050		86	RCMU0086	93	RCMU0093	100	RCMU0100	
52	RCMU0052		87	RCMU0087	94	RCMU0094	101	RCMU0101	
55	RCMU0055		88	RCMU0088	95	RCMU0095	102	RCMU0102	
59	RCMU0059		89	RCMU0089	96	RCMU0096			
60	RCMU0060		90	RCMU0090	97	RCMU0097			
65	RCMU0065		91	RCMU0091	98	RCMU0098			

Parts – Coolant System

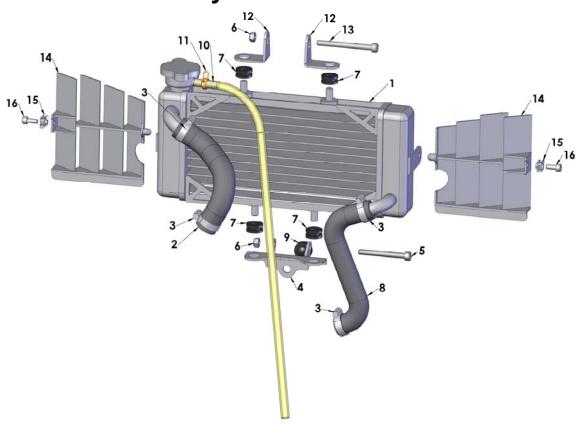


	Coolant System				
REF#	PART#	DESCRIPTION			
1	FCCJ0004	RADIATOR WITH CAP			
2	MCMUHO02	RADIATOR HOSE LEFT			
3	MCMUCL07	HOSE CLAMP			
4	EACJ0001	MOUNTING BRACKET – RADIATOR BOTTOM			
5	HCBC0608	M6X55mm SOCKET HEAD CAP SCREW			
6	HCNL0601	M6 LOCK NUT			
7	MCKGGR00	GROMMET – RADIATOR MOUNTING			
8	MCCMHO01	RADIATOR HOSE RIGHT			
9	TCCJ0001	BUMPER – RAD BRACKET			
10	FCMU0049	OVERFLOW HOSE – 20"			
11	MCMUCL05	HOSE CLAMP, OVERFLOW HOSE			
12	ECHA0109	MOUNTING BRACKET – RADIATOR TOP (2 REQ'D)			
13	HCBC0665	M6X65mm SOCKET HEAD CAP SCREW			
14	FCCJ0002	LOUVER SET (LEFT AND RIGHT)			
15	HCCN0000	5mm CLIP NUT			
16	HCBC0501	M5X12mm SOCKET HEAD CAP SCREW			
17	FCMU0022	CAP, 1.2 BAR			
KIT	FKMU0001	RADIATOR SERVICE REPLACEMENT KIT (INCLUDES HARDWARE)			

Parts – Electrical System

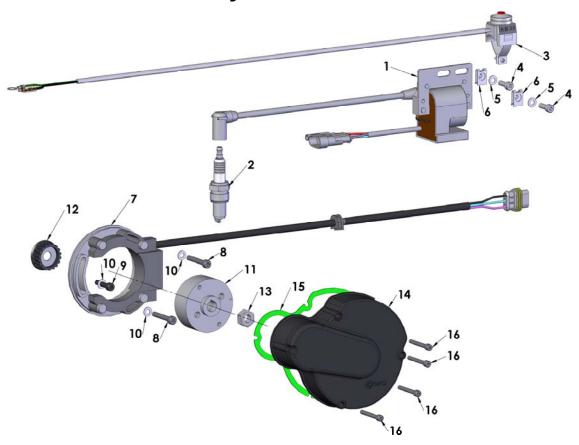


		Electrical System
REF#	PART#	DESCRIPTION
1	IAMU0005	COIL W/SPARK PLUG CAP
2	ECMU0010C	SPARK PLUG CAP SPARK PLUG AUTO AU
3	FCMU0033	KILL SWITCH ASSEMBLY
4	HCBC0516	M5X16mm SOCKET HEAD CAP SCREW (2 REQ'D)
5	HCWF0501	5mm WASHER (2 REQ'D)
6	HCNL0501	M5 LOCK NUT (2 REQ'D)
7	ICMU0018	STATOR WITH GROMMET
8	HCBC0535	M5X35mm SOCKET HEAD CAP SCREW (2 REQ'D)
9	HCBC0525	M5X25mm SOCKET HEAD CAP SCREW
10	HCWF0504	5mm WASHER FOR STATOR (3 REQ'D)
11	ICMU0036	ROTOR – LOW INERTIA
12	ECKG0042	PULLEY, WATERPUMP CRANK
13	HCNS1001	M10 NUT
14	ECCS0001	IGNITION COVER
15	ZCCS0002	GASKET – IGNITION COVER
16	HCBC0402	M4X35mm SHCS (4 REQ'D)
17	ICMU0012	WOODRUFF KEY (NOT SHOWN)
ACCESSORY	ICMU0017	SPARK PLUG CAP – 0 Ω

Parts – Engine – Bottom End and Transmission

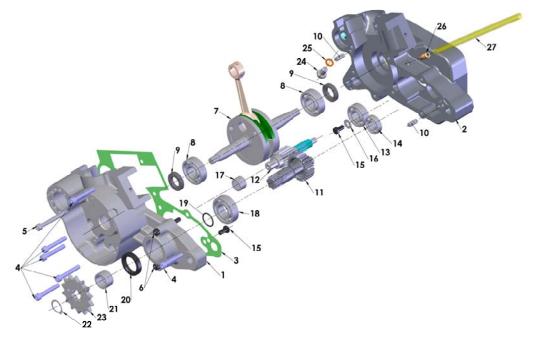

	[Engine Bottom End and Transmission
REF#	PART#	DESCRIPTION
1 & 2	EKCS0002	ENGINE CASE SET W/B&S 50 2011 JR
3	ZCCS0005	GASKET, CRANKCASE CENTER
4	HCBC0605	M6X40mm SOCKET HEAD CAP SCREW (6 REQ'D)
5	HCBC0608	M6X55mm SOCKET HEAD CAP SCREW (1 REQ'D)
6	HCBC0606	M6X45mm SOCKET HEAD CAP SCREW (2 REQ'D)
7	ECMU0038	CRANKSHAFT
8	ECMU0016	BEARING, CRANKSHAFT
9	ECMU0118	SEAL, CRANKSHAFT
10	HCDP1401	DOWEL, ENGINE CASE ALIGNEMENT (2 REQ'D)
11	DECMU0999	OUTPUT SHAFT, TRANSMISSION WITH GEAR
12	ECMU0100	SECONDARY SHAFT, TRANSMISSION WITH GEAR
13	ECMU0001	BEARING, TRANMISSION SECONDARY SHAFT
14	ECKG0031	BEARING OUTPUT SHAFT, RIGHT SIDE
15	HCBH0612	M6X12mm HEX HEAD SCREW - BEARING RETAINER (2 REQ'D)
16	HCWF0316	WASHER – FLAT
17	ECMU0020L	BEARING, TRANSMISSION PRECISION
18	ECKGBR01	BEARING, TRANSMISSION OUTPUT SHAFT
19	ZCDCOR01	O-RING, SPROCKET SPACER
20	ECMU0072	SEAL, OUTPUT SHAFT
21	ECMU0073	SPACER, SPROCKET
22	ECKGSR03	SNAP RING, SPROCKET
23	PCKG0014	SPROCKET, 14 T
24	HCBH0805	M8X12mm SCREW – COOLANT DRAIN
25	HCWC0000	COPPER GASKET
26	ECMU0533	FITTING, CRANKCASE VENT
27	ECMU0534	VENT HOSE, CRANKCASE, 9"
28	ECMU0156	SHIM – OUTPUT SHAFT 50'S (MAY NOT BE NEEDED)

Parts – Engine Clutch and Kicker

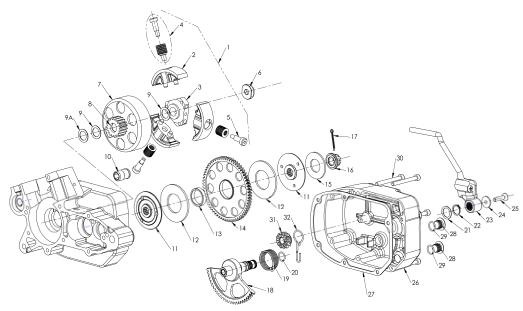

		Engine – Clutch and Kick Starter
REF#	PART#	DESCRIPTION
1	CAMU0005	CLUTCH COMPLETE
2	CAMU0013	CLUTCH SHOES (SET OF 3) WITH BOLT & WASHERS
3	CCMU0029	CLUTCH ARBOR
4	CAMU0010	SPRINGS, WASHER & BOLT (SET OF 3)
5	HCBS0004	CLUTCH BOLT (3 REQ'D)
6	ECMU0018	CLUTCH NUT, SPECIAL
7	ECMU0120	CLUTCH BASKET WITH NEEDLE BEARING
8	ECMU0119	CLUTCH BEARING
9	ECMU0040	CLUTCH TO HUB SPACER (0.030", 0.76mm) (2 REQ'D)
9A	ECMU0040T	CLUTCH TO HUB SPACER (THIN – 0.015", 0.38mm)
10	ECMU0132	COOLANT FITTING
KIT	EKMU0005	COMLETE GEAR CFD UPGRADE KIT
KIT	EKMU0006	CFD RFRESH KIT W/NUT, SPRING, AND FRICTIONS
11	ECMU0306	SLIP HUB V3 CFD
12	ECMU0249	FRICTION MATERIAL V3 CFD THICK (2 REQ'D)
13	ECMU0305	BUSHING V3 CFD 7mm
14	ECMU0301	GEAR V3 CFD
15	ECMU0308	BELLEVILLE SPRING V3 CFD
16	ECMU0307	NUT V3 CFD
17	HCCP0002	COTTER PIN 3/32" X 1 1/4"
18	EAMU0001	KICKSTART GEAR & SHAFT
19	ECMU0116	SPRING, KICKSTART
20	ZCMUB014	O-RING KICK SHAFT
21	HCWS1622	SHIM, KICK SHAFT
22	ECDC0036	SNAP RING, KICK SHAFT
23	ECMU0130	KICK LEVER W/BOLT
24	ECMU0250	WASHER – KICK LEVER MOUNTING
25	HCBF0625	6MM X 25 FLANGE HEAD BOLT
26	ECMU0115	CLUTCH COVER
27	ZCMU0030	CLUTCH COVER GASKET
28	ECMU0168	OIL FILL PLUG, ALUMINUM
29	ZCMUB014	O'RING, OIL FILL PLUG
30	HCBC0608	6MM X 55 SOCKET HEAD CAP SCREW (6 REQ'D)
31	ECMU0207	KICKSTART GEAR SMALL
32	ECMUSP01	KICK START DOG SPRING (PAPER CLIP / 'J' SPRING)
ACCESSORY	HKCP0001	10 PACK OF COTTER PINS (HCCP0002)

Parts – Engine – Water Pump


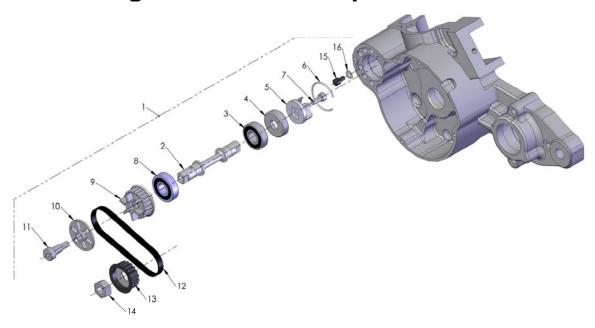


Figure 7C


Engine – Water Pump		
REF#	PART#	DESCRIPTION
1	EKMU0011	WATER PUMP KIT WITH IMPELLER
1	EKMU0021	WATER PUMP KIT WITHOUT IMPELLER
2	ECKG0142	SHAFT, WATER PUMP
3	ECKG0072	BEARING, WATER PUMP
4	ECKG0074	SEAL, WATER PUMP SHAFT
5	ECKG0073	IMPELLER, WATER PUMP (ALUMINUM)
7	HCBC1512	M5X12mm SOCKET HEAD CAP SCREW (STAINLESS)
8	ECMU0167	BEARING – WATER PUMP BIG
9	ECKG0175	WATER PUMP PULLEY, FAN TYPE - DRIVEN
10	ECMU0180	BELT RETAINER
11	HCBS0003	SHOULDER BOLT 6mm
12	ECKG0170	WATER PUMP BELT
13	ECKG0042	WATER PUMP PULLEY, CRANK
14	HCNS1001	M10 NUT
15	HCBC0408	M4X8mm SOCKET HEAD CAP SCREW (BLACK OXIDE)
16	HCWF0401	4mm WASHER

Parts – Engine – Top End

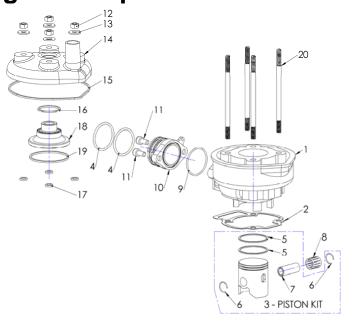


Engine – Top End		
REF#	PART#	DESCRIPTION
1	ECCJ0001	CYLINDER (INCLUDES PISTON, RINGS, PIN & CLIPS)
2	ZCMU0011	BASE GASKET (0.25mm) THICK
2	ZCMU0703	BASE GASKET (0.30mm) THICK
2	ZCKG0501	BASE GASKET (0.40mm) THICK
2	ZCMU0705	BASE GASKET (0.50mm) THICK
2	ZCMU0706	BASE GASKET (0.60mm) THICK
2	ZCMU0708	BASE GASKET (0.80mm) THICK
3	ECMU0060A	PISTON KIT – 'A'
3	ECMU0060AB	PISTON KIT – 'AB'
3	ECMU0060B	PISTON KIT – 'B'
3	ECMU0060C	PISTON KIT – 'C'
3	ECMU0060CD	PISTON KIT – 'CD'
3	ECMU0060D	PISTON KIT – 'D'
4	ZCMOTE11	O-RINGS – PIPE TO FLANGE (2 REQ'D)
5	ECMU0155	PISTON RINGS (2 PER SET)
6	ECMUSR00	SNAP RING FOR PISTON (2 REQ'D)
7	ECKG0012	WRIST PIN
8	ECMU0077	BEARING, WRIST PIN
9	ZCMUOR07	O-RING, EXHAUST FLANGE
10	ECMU0086	EXHAUST FLANGE
11	HCBC0612	M6X12mm, EXHAUST FLANGE SCREW (2 REQ'D)
12	HCNF0601	M6 FLANGE NUT (4 REQ'D)
13	HCWS1401	HARDENED WASHER (4 REQ'D)
14	ECMU0530	CYLINDER HEAD OUTER
15	ZCMUOR02	O-RING, CYLINDER HEAD LARGE
16	ZCMUV024	O-RING CYLINDER HEAD SMALL
17	ZCMUOR10	O-RING CYLINDER STUD (4 REQ'D)
18	ECMU0532	CYLINDER HEAD, INSERT
19	ZCMUV032	O-RING CYLINDER HEAD MEDIUM
20	ECMU0075	STUD, CYLINDER 6mm (4 REQ'D)
ACCESSORY	ZAKGOR05	TOP END/O-RING KIT

Parts – Exhaust System

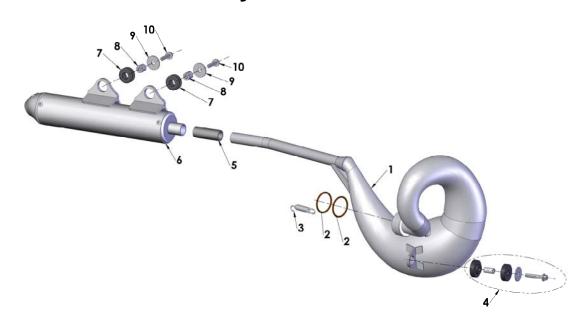

	Exhaust System		
REF#	PART#	DESCRIPTION	
1	XCCJ2009	2009-2011 CX50JR EXHAUST PIPE	
2	ZCMOTE11	HEADER PIPE O-RINGS (2 REQ'D)	
3	XCMU0005	EXHAUST SPRING - SHORT	
4	MCMUGR02	GROMMET KIT AND SPACER	
5	XCMU0028	PIPE / SILENCER SEAL	
6	XAEX0001	SILENCER	
7	MCMUGR03	MOUNTING GROMMET (2 REQ'D)	
8	TCKG0001	SPACER (2 REQ'D)	
9	HCWF1410	FLAT WASHER	
10	HCBF0625	M6X25mm FLANGE HEAD BOLT (2 REQ'D)	
ACCESSORY	XCMU0026	SILENCER PACKING KIT	
ACCESSORY	HCBB0408	M4X8mm SILENCER SCREW	


Parts – Forks & Triple Clamps **

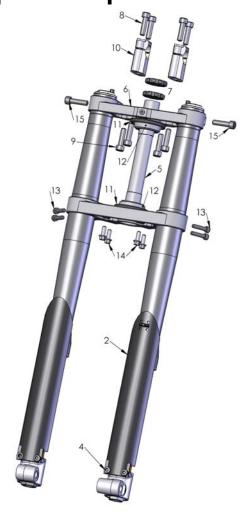

FRONT FORKS AND TRIPLE CLAMPS		
REF#	PART#	DESCRIPTION
1	KACJ0001	FORK ASSEMBLY FORK LEGS ONLY
2	KCKG0140	FORK GUARD SET
3	MCMUZT04	ZIPTIE 4"
4	HCBB0612	M6X12mm BUTTON HEAD (4) REQUIRED
5	FACJ0002	TRIPLE CLAMP BOTTOM ASSY JR (1 BEARING AND DUST COVER)
6	FCCJ0019	TRIPLE CLAMP TOP JR
7	HCNJ0102	JAM NUT STEERING STEM (2 REQUIRED)
8	HCBC0806	M8X30mm SHCS (4 REQ'D)
9	HCBC0820	M8 X 20 SHCS (4 REQ'D0
10	TKMU0404	HANDLE BAR CLAMP KIT SHORT (STANDARD)
10A	TKMU0403	HANDLE BAR CLAMP KIT TALL
11	FCMU1103	DUST COVER STEER STEM, RUBBER (2 REQ'D)
12	FCMU0004	BEARING - STEERING TAPERED (2 REQ'D0
13	HCBC0625	M6X25mm SOCKET HEAD CAP SCREWS (4 REQ'D)
14	HCBF0616	M6X16mm FLANGED HEAD W/8mm HEX
15	HCBC0825	M8X25mm SOCKET HEAD CAP SCREW (4 REQ'D)

^{**} Early 2011 units were shipped with conventional 32mm Marzocchi forks. If you require parts for this fork, please call Cobra Customer Service.


Parts – Forks – Leg Assembly – Brake Side

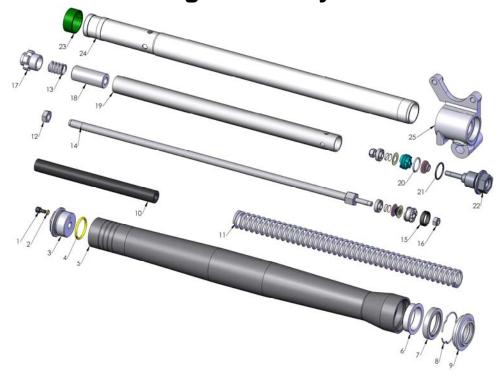

REF#	PART#	DESCRIPTION
1	HCBC0408	M4X8mm SOCKET HEAD CAP SCREW (BLEED SCREW)
2	ZCKG0001	GASKET, BLEED SCREW
3	KCKG0047	FORK CAP
4	ZCMUOR08	ORING GASKET FORKCAP
5	KCKG0121	FORK OUTER TUBE TAPERED
6	KCKG0051	FORK BUSHING
7	KCMU0007	FORK SEAL 30mm
8	KCKG0052	FORK WIRE RETAINER
9	KCKG0008	FORK SWIPER 30mm
10	KCKG0048	FORK BOTTOMING CUSHION
11	KCCJ0021	FORK SPRING JR 0.21 Kg/mm (STANDARD)
11	KCCJ0018	FORK SPRING JR 0.18 Kg/mm (LIGHT)
11	KCCJ0025	FORK SPRING JR 0.25 Kg/mm (HEAVY)
12	HCNJ3824	NUT JAM 3/8-24 CLASS 8
13	KCKG0050	FORK TOP OUT SPRING
14	KAKG0001	DAMPER ROD ASSEMBLY
15	KCCS0018	SEAL FORK PISTON MID VALVE
16	HCNL0601	M6 LOCKNUT
17	KCCS0001	FORK CARTRIDGE CAP 30mm
18	KCCJ0002	FORK TRAVEL LIMITER SPACER
19	KCKG0019	FORK CARTRIDGE TUBE LIGHT WEIGHT
20	KCMU0021	ORING FORK BASE VALVE
21	ZCKGB017	ORING FORK BOTTOM PLUG
22	KCKG0018	FORK BOTTOM PLUG
23	KCKG0049L	GLIDERING KING FORK LOOSE
24,25	KAKG0144	FORK LEG INNER/BOTTOM BRAKE SIDE (NOT SOLD SEPARATELY)

^{**} Early 2011 units were shipped with conventional 32mm Marzocchi forks. If you require parts for this fork, please call Cobra Customer Service.


Parts – Forks – Leg Assembly – Non-Brake Side

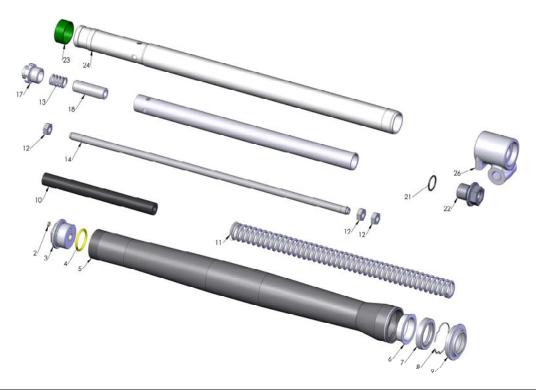

REF#	PART#	DESCRIPTION
1	HCBC0408	M4X8mm SOCKET HEAD CAP SCREW (BLEED SCREW)
2	ZCKG0001	GASKET, BLEED SCREW
3	KCKG0047	FORK CAP
4	ZCMUOR08	ORING GASKET FORKCAP
5	KCKG0121	FORK OUTER TUBE TAPERED
6	KCKG0051	FORK BUSHING
7	KCMU0007	FORK SEAL 30mm
8	KCKG0052	FORK WIRE RETAINER
9	KCKG0008	FORK SWIPER 30mm
10	KCKG0048	FORK BOTTOMING CUSHION
11	KCCJ0021	FORK SPRING JR 0.21 Kg/mm (STANDARD)
NOT SHOWN	KCCJ0018	FORK SPRING JR 0.18 Kg/mm (LIGHT)
NOT SHOWN	KCCJ0025	FORK SPRING JR 0.25 Kg/mm (HEAVY)
12	HCNJ3824	NUT JAM 3/8-24 CLASS 8 (3 REQ'D)
13	KCKG0050	FORK TOP OUT SPRING
14	KCKG0017	DAMPER TUBE
17	KCCS0001	FORK CARTRIDGE CAP 30MM
18	KCCJ0002	FORK TRAVEL LIMITER SPACER
19	KCKG0019	FORK CARTRIDGE TUBE LIGHT WEIGHT
21	ZCKGB017	ORING FORK BOTTOM PLUG
22	KCKG0018	FORK BOTTOM PLUG
23	KCKG0049L	GLIDERING KING FORK LOOSE
24,26	KAKG0145	FORK LEG INNER/BOTTOM BRAKE SIDE (NOT SOLD SEPARATELY)


^{**} Early 2011 units were shipped with conventional 32mm Marzocchi forks. If you require parts for this fork, please call Cobra Customer Service.

Parts – Frame – Mounting Hardware I

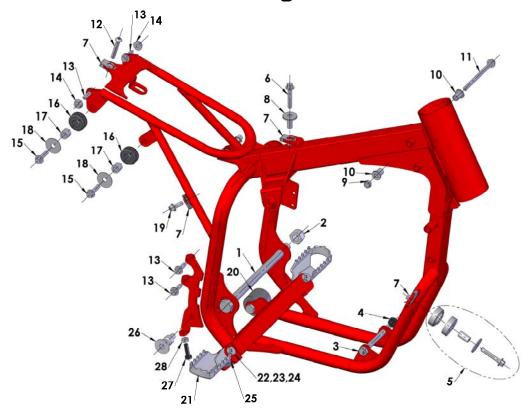


	Frame – Engine, Swingarm, Tank, and Pipe Mounts		
REF#	PART#	DESCRIPTION	
1	WCMU0016	SWINGARM BOLT	
2	HCNL1201	M12 SWINGARM LOCK NUT	
3	HCBH0880	M8X80mm SOCKET HEAD CAP SCREW	
4	HCNL0801	M8 LOCKNUT	
5	MCMUGR02	GROMMET KIT PIPE & SPACER	
6	HCBF0635	M6X35mm FLANGE HEAD BOLT	
7	HCHA0003	6mm CLIPNUT	
8	TCHA0004	BUSHING – REAR TANK MOUNTING	
9	HCNL0601	M6 LOCKNUT	
10	TCHA0006	BUSHING – FRONT TANK MOUNT (2 REQ'D)	
11	HCBF0685	M6X85mm SOCKET HEAD CAP SCREW	
12	HCBB0635	M6X35mm BUTTON HEAD CAP SCREW	
13	HCBF0620	M6X20mm FLANGE HEAD BOLT	
14	HCNF0602	M6 NYLOC FLANGE NUT	
15	HCBF0625	M6X25mm FLANGE HEAD BOLT	
16	MCMUGR03	GROMMET – SILENCER (2 REQ'D)	
17	TCKG0001	SPACER FOR EXHAUST GROMMETS	
18	HCWF1478	WASHER – EXHAUST GROMMET	
19	HCBF0616	M6X16mm FLANGE HEAD BOLT	
20	FCMU0057	CHAIN ROLLER	
21	TCMU0010	WIDE FOOTPEGS (PAIR) KING STYLE	
22	HCBH0840	M8X40mm FOOTPEG BOLT	
23	HCNL0802	M8 LOCKNUT	
24	HCWF0803	8mm FLAT WASHER	
25	TCMU0106	FOOTPEG SPRINGS (SINGLE PIECE)	
26	BCDC0009	BRAKE PEDAL PIVOT BOLT	
27	HCBH0620	M6X20mm HEX HEAD BOLT	
28	HCNS0601	M6 NUT	

Parts – Frame – Mounting Hardware II

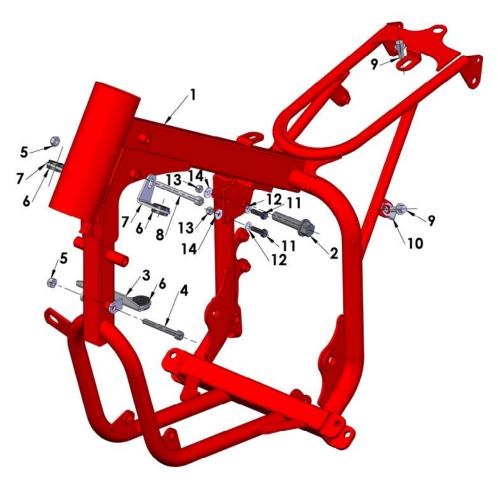


	Frame – Seat, Fender, Right Side Panel, Silencer & Shock Mounts		
REF#	PART#	DESCRIPTION	
1	FACJ2011	FRAME CX50 JR	
2	HCBF1040	M10X40mm FLANGE HEAD BOLT	
3	ECHA0003	MOUNTING BRACKET – RADIATOR BOTTOM	
4	HCBC0608	M6X55mm SOCKET HEAD CAP SCREW	
5	HCNL0601	M6 LOCK NUT	
6	MCKGGR00	GROMMET – RADIATOR MOUNT (2 REQ'D ON BOTTOM, 2 ON TOP BRACKET)	
7	ECHA0109	MOUNTING BRACKET – RADIATOR TOP	
8	HCBC0665	M6X65mm SOCKET HEAD CAP SCREW	
9	HCBF0616	M6X16mm FLANGE HEAD BOLT	
10	HCHA0003	6mm CLIPNUT	
11	HCBH0502	M5X16mm HEX HEAD BOLT (2 REQ'D)	
12	HCWP0002	WASHER POP RIVET(2 REQ'D)	
13	HCNL0501	M5 LOCKNUT (2 REQ'D)	
14	HCWF0501	5mm FLAT WASHER (2 REQ'D)	

Parts – Front Brakes

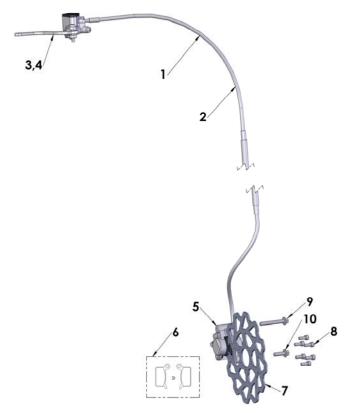

	Front Brakes		
REF#	PART#	DESCRIPTION	
1	BAKG0003	FRONT BRAKE ASSEMBLY	
2	BCKG0030	HOSE – BRAKE FRONT	
3	BCKG0023	ALLOY BRAKE LEVER	
4	BCKG0024	BRAKE PERCH & MASTER CYLINDER ASSY W/ LEVER	
5	BCKG0029	CALIPER – FRONT	
6	BKKG0001	BRAKE PADS, WITH "E" CLIP	
7	BCMU0503	BRAKE ROTOR	
8	HCBC0501	M5X12mm SOCKET HEAD CAP SCREW (6 REQ'D)	
9	HCBF0640	M6X40mm SOCKET HEAD CAP SCREW	
10	HCBF0620	M6X20mm SOCKET HEAD CAP SCREW	
ACCESSORY	MCMUBF01	BRAKE FLUID **DOT 5.1 OR HIGHER**	
ACCESSORY	BCKG0031	BLEED KIT (MULTIPLE SYRINGES, FITTINGS & HOSE)	
ACCESSORY	BCKG0028	LEVER ADJUSTMENT KIT	
ACCESSORY	BCKG0027	RESERVOIR SEAL KIT	
ACCESSORY	BCKG0025	REPLACEMENT BAR CLAMP AND SCREWS (FOR MASTER CYLINDER)	
ACCESSORY	BCKG0026	PISTON & REBUILD KIT FOR MASTER CYLINDER	
ACCESSORY	BCKG0017	CALIPER ORING & BOLTS (F&R)	
ACCESSORY	BCKG0018	CALIPER PISTON KIT (F&R)	
ACCESSORY	BCKG0019	RETURN SPRING (4 FINGER SPRING)	
ACCESSORY	ZCMUOR09	O'RING - BANJO FITTING	
ACCESSORY	BCMU0014	CALIPER ADJUSTMENT SHIMS 6MM ID	
ACCESSORY	BCKG0033	O-RING – BLEEDER – 2mm SPECIAL	

Parts – Front Wheel

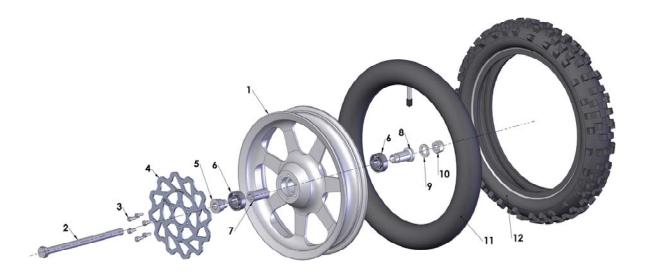


	Front Wheel		
REF#	PART#	DESCRIPTION	
1	WACJ0001	WHEEL WITH BEARINGS (NO TIRE & TUBE) SPOKE STYLE	
2	WCMU0016	FRONT AXLE	
3	HCBC0501	M5X12mm SOCKET HEAD CAP SCREW (6 REQ'D)	
4	BCMU0503	BRAKE ROTOR – FRONT	
5	WCMU0101	WHEEL SPACER LEFT (SHORT)	
6	WCMU0120	BEARING – WHEEL (2 REQ'D)	
7	WCCJ0004	SPACER – WHEEL FRONT	
8	WCCJ0003	WHEEL SPACER RIGHT (LONG)	
9	HCWF1202	WASHER – AXLE	
10	HCNL1201	LOCK NUT – AXLE	
11	WCMUTU10	TUBE 10"	
12	WCMU1050D	FRONT TIRE 10" X 2.50" DUNLOP MX51	

Parts – Plastic & Seat




		Plastic and Seat
REF#	PART#	DESCRIPTION
1	TCHA0107	FRONT FENDER - YELLOW
1A	HCBF0616	FENDER BOLT, M6X16mm FLANGE HEAD (4 REQ'D)
2	TCMU0005	NUMBER PLATE – FRONT WHITE
2A	HCBF0625	M6X25mm FLANGE HEAD BOLT – FRONT NUMBER PLATE MOUNT
3	TCHA0008	RADIATOR SHROUD - RIGHT - YELLOW BACKWARDS COMPATIBLE TO 2003
3A	TCMU0032	RADIATOR PAD
4	TCHA0009	RADIATOR SHROUD – LEFT - YELLOW BACKWARDS COMPATIBLE TO 2003
4A	MCMUBC01	BUNGEE CORD – SHROUD HOLDING (NOT SHOWN)
5	TCHA0001	FUEL TANK – NO CAP OR PETCOCK
5A	HCFH0620	M6X20mm PHILIPS HEAD SCREW – SEAT & SHROUD HOLD
5B	TCHA0005	SPACER – SEAT & SHROUD HOLD
5C	TCHA0006	SPACER – FRONT TANK MOUNT (2 REQ'D)
5D	HCBC0685	M6X85mm SHCS – FRONT TANK MOUNT
5E	HCNL0601	M6 LOCK NUT – FRONT TANK MOUNT BOLT
5F	HCBC0645	M6X45mm SOCKET HEAD CAP SCREW
5G	TCHA0004	BUSHING – REAR TANK MOUNTING
6	TCHA0002	CAP – FUEL TANK
7	TCHA0003	HOSE – FUEL CAP
8	TCMU0151	FUEL PETCOCK
9	TCCM0007	SEAT
9A	HCBB0640	M6X40mm SHCS – SEAT HOLDING
9B	MCMU0013	STRAP HANDLE
10 & 11	TCCJ0003W	NUMBER PLATE SET (LEFT AND RIGHT) - WHITE
10 & 11	TCCJ0003Y	NUMBER PLATE SET (LEFT AND RIGHT) - YELLOW
10 & 11	TCCJ0003B	NUMBER PLATE SET (LEFT AND RIGHT) - BLACK
10A	HCBF0616	M6X16mm FLANGE HEAD BOLT – FRONT SECURE
10B	HCBF0620	M6X20mm FLANGE HEAD BOLT – FENDER & REAR SECURE
10C	HCNF0602	M6 NYLOC FLANGE NUT
10D	HCBF0616	M6X16mm FLANGE HEAD BOLT – FRONT SECURE
10E	HCBF0620	M6X20mm FLANGE HEAD BOLT – FENDER & REAR SECURE
10E	HCNF0602	M6 NYLOC FLANGE NUT
12	TCHA0112	FENDER – REAR
12A	HCBF0616	M6X16mm FLANGE HEAD BOLT – FENDER & AIRBOX SECURE
ACCESSORY	TCCJ2011	GRAPHIC KIT 2011
ACCESSORY	TKCJ0002B	BODYWORK KIT - BLACK
ACCESSORY	TKCJ0002W	BODYWORK KIT - WHITE
ACCESSORY	TKCJ0002Y	BODYWORK KIT - YELLOW

Parts – Rear Brake

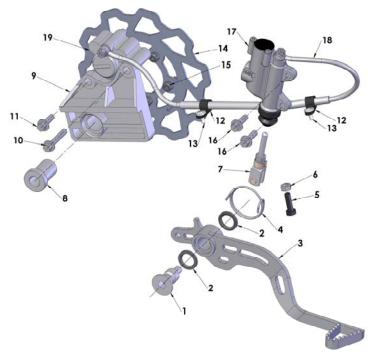


Rear Brake System				
REF#	PART#	DESCRIPTION		
1	BCDC0009	BRAKE PIVOT BOLT		
2	BCMU0501	SEAL – BRAKE PEDAL (2 REQ'D)		
3	BCMU0099	BRAKE PEDAL		
4	BCMUSP02	BRAKE RETURN SPRING		
5	HCBH0620	M6X20mm HEX HEAD BOLT		
6				
7	HCNS0601	M6 NUT		
	BACJ0001	PUSH ROD, REAR BRAKE		
8	BCKG0006	WHEEL SPACER - FLOATING CARRIER		
9	BCKG0103	BRAKE CARRIER WITH PAD		
10	HCBF0635	M6X35mm FLANGE HEAD BOLT		
11	HCBF0620	M6X20mm FLANGE HEAD BOLT		
12A	HCCC0000	BRAKE HOSE CLAMP (2 REQ'D) for hose with clear cover		
12B	HCCC0006	BRAKE HOSE CLAMP (2 REQ'D) for hose with black cover		
13	HCPP0832	BRAKE HOSE CLAMP FASTENER (2 REQ'D)		
14	BCMU0502	BRAKE ROTOR		
15	HCBC0601	M6X16mm SOCKET HEAD CAP SCREWS (5 REQ'D)		
16	HCBF0620	M6X20mm FLANGE HEAD BOLT		
17	BCKG0012	BRAKE – MASTER CYLINDER - REAR		
18	BCKG0010	REPLACEMENT BRAKE HOSE		
19	BCKG0013	CALIPER – REAR BRAKE		
ACCESSORY	BKKG0001	BRAKE PADS WITH "E" CLIP		
ACCESSORY	BCKG0031	BLEED KIT (MULTIPLE SYRINGES, FITTINGS & HOSE)		
ACCESSORY	BCKG0014	FITTING KIT		
ACCESSORY	BCKG0015	MASTER CYLINDER PISTON / SEAL KIT		
ACCESSORY	BCKG0016	RESERVOIR SEAL KIT		
ACCESSORY	BCKG0017	CALIPER BOLT / O-RING KIT		
ACCESSORY	BCKG0018	CALIPER PISTON / SEAL KIT		
ACCESSORY	BCKG0019	PAD RETURN SPRING (4 LEG SPRING)		
ACCESSORY	ZCMUOR09	O-RING - BANJO FITTING		

Parts – Rear Wheel

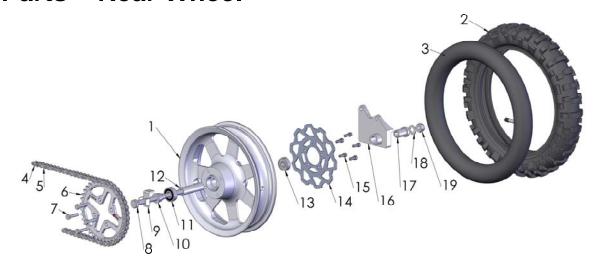


Rear Wheel				
REF#	PART#	DESCRIPTION		
1	WAKG2007R	REAR WHEEL W/BEARINGS		
2	WCMU1075D	TIRE – REAR 10" X 2.75" DUNLOP MX51		
3	WCMUTU10	TUBE, 10"		
4	PCMU0001	MASTER LINK 420		
5	PCMU0100	CHAIN 420 X 100		
6	PCMU01xx	xx DENOTES TEETH – RANGE OF TEETH (34-45)		
7	HCBH0702	M7X30mm HEX HEAD BOLT		
7A	HCWF0701	7mm FLAT WASHER (4 REQ'D)		
7B	HCNL0701	M7 LOCKNUT (4 REQ'D)		
8	WCMU0016	REAR AXLE		
9	HCPA0002	AXLE HEAD FIXING PLATE		
10	WCMU0101	WHEEL SPACER		
11	WCMU0120	WHEEL BEARING SPROCKET SIDE		
12	WCMU0034	WHEEL BEARING SPACER		
13	WCMU0020	WHEEL BEARING BRAKE SIDE		
14	BCMU0502	BRAKE ROTOR		
15	HCBC1616	M6X16mm SOCKET HEAD CAP SCREWS (5 REQ'D)		
16	BCKG0103	BRAKE CARRIER		
17	BCKG0006	WHEEL SPACER - FLOATING CARRIER		
18	HCWF1202	AXLE WASHER		
19	HCNL1201	M12 AXLE NUT		
ACCESSORY	BCKG0104	BRAKE CARRIER PAD		

Parts - Shock

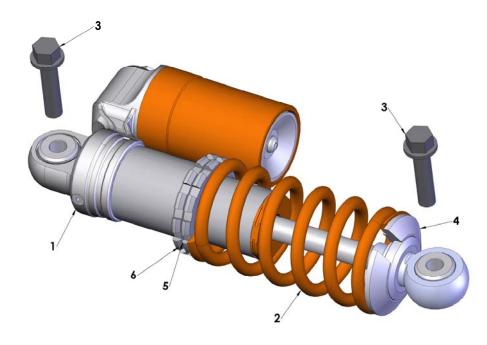

REAR SHOCK				
REF#	PART#	DESCRIPTION		
1	SACM2007	SHOCK ABSORBER - OHLINS		
2	SCMUOH05	SPRING – STANDARD (285 lb/in)		
2	SCMUOH04	SPRING – LIGHT (275 lb/in)		
2	SCMUOH06	SPRING – HEAVY (295 lb/in)		
3	HCBF1040	M10X40mm FLANGE HEAD BOLT		
4	SCKGOH01	SPRING PLATFORM (BOTTOM)		
5	SCKGOH04	SPRING PLATFORM (UPPER THREADED)		
6	SCKGOH05	LOCKNUT		
ACCESSORY	SCKGOH02	BUSHING - BALL JOINT-OHLINS (2 REQ'D)		
ACCESSORY	SCKGOH03	BEARING BALL JOINT – OHLINS		
ACCESSORY	SCKGOH11	ORING BALL JOINT – OHLINS (2 REQ'D)		

Parts – Swingarm Assembly

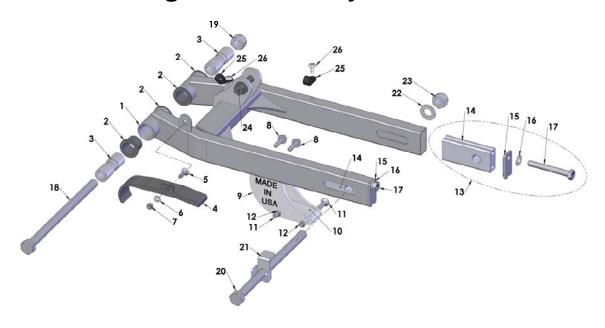

	Swingarm				
REF#	PART#	DESCRIPTION			
1	GACJ2011	SWINGARM			
2	GCMU0001	SWINGARM BUSHING (SINGLE PIECE) (4 REQ'D)			
3	GCCJ0001	SPACER - PIVOT TUBE (2REQ'D)			
4	GCMU0017	CHAIN GUARD			
5	HCFH0516	M5X16mm FLAT HEAD SCREW			
6	HCWF0501	5mm FLAT WASHER			
7	HCNL0501	M5 LOCK NUT			
8	HCBF0620	M6X20mm FLANGE HEAD BOLT (2 REQ'D)			
9	PAKG0001	CHAIN GUIDE - ASSEMBLY COMPLETE			
10	PCKG0004	CHAIN GUIDE - BOTTOM SLIDER			
11	HCBFT640	M6X40mm FLAT HEAD BOLT (2 REQ'D)			
12	HCNL0601	M6 LOCKNUT (2 REQ'D)			
13	FAMU0005	WHEEL PULL ASSEMBLY ((BLOCK, CAP, BOLT, AND WASHER)			
14	FCMU0203	WHEEL PULL			
15	FCMU0202	WHEEL PULL ENDCAP			
16	HCWF0801	8mm FLAT WASHER			
17	HCBH0810	M8X65mm HEX HEAD BOLT (FULL THREAD)			
18	WCMU0016	SWINGARM PIVOT BOLT 195mm			
19	HCNL1201	M12 LOCK NUT			
20	WCMU0016	AXLE BOLT 195mm			
21	HCPA0002	AXLE HEAD FIXING PLATE			
22	HCWF1202	AXLE WASHER			
23	HCNS1201	M12 LOCK NUT			
24	HCBF1040	M10X40mm FLANGE HEAD BOLT			
25A	HCCC0000	BRAKE HOSE CLAMP (2 REQ'D) for hose with clear cover			
25B	HCCC0006	BRAKE HOSE CLAMP (2 REQ'D) for hose with black cover			
26	HCPP0832	BRAKE HOSE CLAMP FASTENER (2 REQ'D)			

Service

Trained technicians with precision gauging and proper assembly fixtures carefully assemble all Cobra engines to specific tolerances. If you feel you have the skills, and the appropriate tools, to perform the following service tasks please follow the instructions closely. The part numbers are listed throughout to help you when ordering parts from your local Cobra dealer.

If you do not feel comfortable with the service work log on to: www.cobramotorcycle.com to find a cobra dealer or call 517-437-9100.

Engine Service

One method for determining whether the top end of your engine needs rebuilt is to perform a wide open throttle kicking compression test. Before performing the procedure please read the caution notes below.

CAUTION:

- There is a large wide range of variability in reading compression gauges.
- The head volume of this Cobra Motorcycle is very small and requires 20 kicks before you establish the most accurate reading possible.
- Because of the geometry of the spark plug used in this Cobra Motorcycle, the adapter used with your compression tester must have a similar volume protruding into the combustion chamber to establish an accurate value.
- Length of hose on the compression tester will affect the reading. The shorter the hose length the more accurate your reading will be.

Because of these difficulties in measuring an *absolute* compression value, a useful *relative* value can be achieved by testing your bike's compression with your own particular gauge after a new top end or when the bike is new so that you know what your particular gauge reads on a 'fresh' engine. When it has dropped to 90% of its original value the engine will be down on power and would benefit from a rebuild. When it's dropped to 80% it really needs rebuilt! Using the table below will help you determine monitor the condition of your top end.

	Engine is Fresh Measured Value	Engine Down on Power Measured Value * 0.9	Engine NEEDS Rebuilt Measured Value * 0.8
Example	110 psi	110 psi * 0.9 = 99 psi	110 psi * 0.8 = 88 psi
Your Values			

Procedure for Compression Testing

- 1. Shut off the fuel petcock.
- 2. Install the compression gauge into the spark plug hole.

3. Hold the throttle wide open, and kick repeatedly (approximately 20 times) or until the gauge reading does not increase in value with each kick.

Base Gasket Selection

Tools required

- 17mm wrench
- 1mm flexible solder material
- measurement calipers

When rebuilding the 'top end' of your Cobra motorcycle, care must be taken to ensure the proper squish clearance. Squish clearance is defined as the minimum distance between cylinder head and piston at TDC. There are negative effects of either having too much or too little clearance. Since parts like the crank, connecting rod, cylinder head, piston, and crankcases all have varying tolerances, Cobra offers several different base gasket thickness' to ensure that you can always set the squish clearance of your engine to factory specifications.

For base gasket replacement use the code (see figure 21 for location) along with the table below to reorder the correct thickness gasket.



Figure 21

Code	Supplied Base Gasket Thickness		Cobra #
			5
#	mm	inch	Part #
3	0.3	0.012	ZCMU0703
4	0.4	0.015	ZCKG0501
5	0.5	0.020	ZCMU0705
6	0.6	0.024	ZCMU0706
7	0.7	0.028	ZCMU0707
8	0.8	0.031	ZCMU0708

NOTE: Tolerances will affect the actual gasket thicknesses.

If top end parts are changed during the course of the maintenance, the squish clearance should be measured, and possibly a different base gasket will be required.

The easiest way to measure squish clearance is with 1mm to 1.5mm thick flexible solder wire (available through most popular electronic stores). The process is as follows:

- Assemble the top end of the engine with either; 1) the crankcase stamp recommended base gasket or, 2) if assembling with a new set of cases assemble with a 0.4mm (0.015") base gasket, and torque the head nuts to the proper torque specifications leaving off the spark plug and ignition cover (piston rings can be left off to ease assembly).
- Carefully insert the solder wire though the spark plug hole, into the cylinder far enough such that the tip of the wire touches the left or right side cylinder wall (not the front or back as the piston will rock more and give incorrect measurement).
- Hold the wire at this position and rotate the crankshaft, by the flywheel nut (or kick lever) three revolutions to crush the solder wire to be measured.

CAUTION:

If you rotate the flywheel nut in a counterclockwise direction there is a risk of loosening the nut.

- Pull out the wire and measure the solder thickness at the thinnest location near its tip accurately with the thin tips of calipers.
- Adjust base gasket thickness as necessary to get the desired value.

Upon completion, your final assembly squish clearance should agree with the chart below



Engine Removal

To service the bottom end/transmission, the engine must be removed from the frame.

Tools required

- 10, 11, 13, 22 mm wrench
- 8, 10, 14, 17 & 19 mm sockets

- 3, 4 & 5 mm Allen wrench
- 7 mm nut driver, flat or Phillip, screwdriver for hose clamps
- Spring remover
- Flywheel / clutch puller (#MCMUTL68)
- Clutch nut removal tool (Call local dealer for details).

Procedure

- 1. Remove the seat.
- 2. Turn of the fuel at the petcock and disconnect the fuel line.
- 3. Remove the tank (8 mm socket).
- 4. Remove the carburetor from the inlet (flat head or Phillips head screwdriver, 7 mm nut driver).
- 5. Remove the silencer & pipe (spring remover, 8mm socket).
- 6. Locate a suitable container for the engine coolant and disconnect the coolant lines connected to the engine (8 mm socket).

NOTE: If the coolant looks to be free of contaminates it may be reused.

- 7. Remove the master link from the chain.
- 8. Remove front engine mount bolt (13 mm socket, 6 mm hex key).
- 9. Remove the swingarm bolt (19mm socket).

NOTE: Only drive the swingarm bolt far enough to clear the engine, leave it holding the one side of the swingarm to the frame

10. Remove the engine from the right side of the frame.

Complete Engine Disassembly Procedure

- 1. Remove the magneto cover (4mm Allen)
- 2. Remove the bolt from the water pump shaft (4mm Allen) and slide off the belt cover and the water pump belt
- 3. Using a flywheel holding tool and 14mm socket remove the nut that secures the flywheel.
- 4. Using the Cobra flywheel / clutch puller (#MCMUTL68), remove the flywheel from the crankshaft.
- 5. Remove the stator (4mm Allen).
- 6. Remove the left hand thread blue nut holding the CFD to the transmission input shaft (19 mm socket).
- 7. Remove the special nut / starter gear that holds on the clutch (special tool available, contact your local dealer).
- 8. With the Cobra flywheel / clutch puller (#MCMUTL68), remove the clutch from the crankshaft (details in Clutch Service portion of this manual).

Top End Disassembly Procedure

- 1. Remove the cylinder head nuts (10mm).
- 2. Remove the cylinder head outer.

3. Remove the cylinder head insert.

INSPECTION NOTE:

Inspect the cylinder head for deposits and abrasions.

- 1. If there are deposits they should be removed
 - a. Black oily deposits (indicating a rich mixture or improper oil type/quantity) can be removed with solvent
 - b. Crusty deposits (indicating dirt ingestion) can be removed with solvent and may require some scraping.
- 2. Abrasions
 - a. Pitting or erosion indicates detonation and may require cylinder head replacement, also
 - i. Retard the ignition timing
 - ii. Use a higher octane fuel
 - b. Missing chunks or indentations indicate broken hardware or ingested items replace the cylinder head.
- 4. Remove the cylinder.

INSPECTION NOTE:

Inspect the cylinder bore for abrasions, deposits, and missing coating.

- 1. If abrasions: scrapes, scratches, pitting, etc... are found, replace the cylinder.
- 2. If deposits are all are found
 - a. Clean with muriatic acid.
 - b. Once the deposits are removed, inspect for abrasions and missing surface coating.
 - i. If there are abrasions or missing coating, replace.
 - ii. If all looks well, the cylinder may be saved.

A WARNING

Muriatic acid can be dangerous. Follow the manufacturer's instructions closely.

- 5. Remove the piston clip with a scribe.
- 6. Remove the piston pin with a piston pin remover.

INSPECTION NOTE:

Inspect the piston for abrasions and deposits on the top and sides and clean or replace as necessary.

INSPECTION NOTE:

Piston ring end gap should be between 0.008" (0.2 mm) and 0.020" (0.5 mm)

Splitting the Cases

- 1. Remove the fasteners holding the two halves of the crankcase together.
- 2. Separate the cases with a proper case splitting tool.

CAUTION:

Take caution when handling the crankshaft. It is the main power transfer to the rest of the engine. If it is out of alignment, it will cause premature failure of your bearings which can lead to serious damage to the cylinder as well as the rest of the engine. Do not try to true the crank yourself. Truing the crank should be done professionally.

CAUTION:

- If you split the cases, check the gear tooth faces for chipping & signs of fatigue.
- Check the small needle bearings for fatigue. If the bearings are damaged, the
 engine cases should be checked to make sure the needle-bearing casing didn't
 oblong the bearing hole in the case.
- Needle bearings should be replaced every 2 months.

Engine Assembly

CAUTION:

For any seals that are to be installed, apply a light amount of grease to the seals' ID, assembly lube on all bearings and a small amount of Loctite to the OD.

- 1. Press the three bearings into the respective holes in each case half.
- 2. Press in the crank seals such that the concave side faces the crank weights.
- 3. Press in the counter shaft seal (concave side faces inside of transmission)
- 4. Install the water pump assembly wire ring retainer
- 5. Press in the water pump assembly
- 6. Tap both ways axially then verify easy rotation.
- 7. Inspect the crankshaft for proper true geometry (no more than 0.002 ", 0.05mm, measured at bearing journal area while supported from the ends).

CAUTION:

Insert a 7.05mm (0.278") shim between the crank throws before pressing on the crank.

8. Insert the case screws with the proper lengths at locations shown.




Figure 28

9. Torque to 12 Nm (105 in-lb) in the pattern shown in figure 28.

10. Trim away any excess gasket material if necessary.

NOTE: Check engine mount holes for excess material that may cause problems in engine installation.

11. Install the piston with new wrist pin bearing and, pin and clips.

CAUTION:

Be sure to install the piston such that the arrow on the top piston surface points to the exhaust (front of bike/engine) and put assembly lube on the connecting rod bearing.

12. Install the piston rings.

CAUTION:

Ring end gap should be no less than 0.25 mm (0.010") and no more than 0.64mm (0.025")

13. Install the base gasket.

CAUTION:

See base gasket selection at the beginning of service section.

14. Install the cylinder being sure that the piston rings are properly aligned with the indexing pins.

CAUTION:

Never force the cylinder. If resistance is felt, determine the problem and solve it. Once installed, slightly rotate the cylinder back and forth insuring that the rings are properly seated.

15. Install cylinder head insert.

NOTE: A light application of silicone grease can help hold the Orings into position during assembly.

- 16. Install O-RINGs as shown in figure 29.
- 17. Install the cylinder head.
- 18. Install the washers (with flat side down) and nuts. Torque to 105 in-lb (12 Nm)
- 19. Install reed and inlet manifold with new gasket (105 in-lb. 12 Nm).
- 20. Leak check the engine at 20 psi to ensure proper seal.
- 21. Install stator reinstalling the grommet and wires
- 22. Install the rotor per *Rotor Installation* section, under the *S3: Ignition* portion of this manual.
- Install the water pump outlet pipe

 (apply Hi-Temp RTV silicon gasket maker to the threads before assembly) before installing the clutch and rotate to a

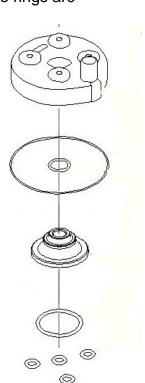


Figure 29

- vertical position with the engine resting on a bench.
- 24. Install the CFD.
- 25. Install the clutch per *Clutch Installation* section in this manual.
- 26. Install the coolant drain plug with copper washer (11 ft-lb, 15 Nm).
- 27. Make sure that the exhaust spacer is on the cylinder (53 in-lb, 6 Nm).
- 28. Install the spark plug with a fresh gasket (to apply the proper torque to the spark plug when inserting, one must first screw the spark plug in until the metal gasket ring causes resistance and then turn another 1/8 to ½ turn).

Clutch

New for 2011, Cobra has again improved the clutch washer design. The new washer stacks have taller springs but are overall shorter and have a single thin shim.

These new washer stacks are being double sorted at the factory. They are first sorted by measured height. Secondly, each stack with bolt is sorted by measured engagement force.

Because of this, we have been able to widen the range of stack heights that provide an acceptable clutch 'hit'. The stacks in each stack of three will measure within 0.05mm (0.002").

There are many variables in an automatic centrifugal clutch. These variables are set to world class standards from the factory but will change over time as the components wear, relax, and just plain get used.

Please see the Tuning Clutch portion of this manual for more helpful info. Factors that affect what the clutch spring stack should be include

- Amount of wear on shoes (this is difficult to measure and can only be approximated by the step in the shoe where it rides outside the basket – new shoes will not have one, old shoes will have a large one).
- 2) Effective length of the shoulder on the clutch arbor bolt (see Figure C1). Nominal is 16.00mm (0.630"). As this decreases, the spring stack needs to decrease equally. This can change due to the shoulder bolt 'setting' into the arbor (see C2)



Figure C1



Figure C2

If your effective shoulder length is off, or your shoes are worn, adjust the height of your overall combined spring stack accordingly (i.e. if your effective shoulder length is 0.5mm short of the 16.00 measurement, decrease the overall combined spring stack height by 0.5mm, or if your shoes are worn by 0.5 mm, increase the overall combined spring stack height by 0.5mm).

Frequently asked questions

Q: When should the springs be replaced?

A: When the clutch 'hit' occurs too early or too late.

Q: Should the clutch springs be replaced if the shoes wiggle on the arbor?

A: Not if the clutch is 'hitting' correctly. Don't mess with it.

Q: What is the acceptable tolerance on any of the measurements?

A: For the most part that does not matter. Suffice it to say that any efforts to make the three shoes behave identically will make the best performing clutch. Taking extra time to balance the three stacks (shims, springs, bolts, etc...) to as close to the same length as you are willing to put effort into will result in a better performing motorcycle.

Q: One of my two riders weighs 85 pounds and the other weighs 45 pounds. Should I have their clutches adjusted differently because of their weight?


A: No, there is one best setting and it works for light or heavy riders.

Q: If my clutch basket changes color, should I replace it?

A: If it is blue or purple, replace it. If it is silver or brown, you are fine.

Cobra is now going to greater lengths to ensure that the clutch on your motorcycle is performing the best possible from the shop and so it may have a different clutch stack or shim washer from what you are used to. Please take measurements for knowledge sake but don't blindly restack washers to different heights without first consulting the factory.

Cobra clutch puller assembly:





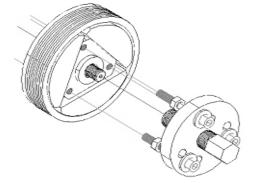


Figure 31 Clutch puller installation

Tools recommended for clutch service:

- Universal clutch puller- a universal puller that pulls the clutch, main drive gear and rotor. (Part # MCMUTL70).
- 5mm T-handle

- Clutch nut removal tool (ECMU0078) & spanner wrench (ECMU0082).
- Cobra 3 Shoe Clutch Milk (Part # MCMUGF32).

Clutch Removal:

- 1. Drain the engine transmission oil and remove the clutch cover.
- 2. Remove the clutch nut (not left hand thread) on the end of the crankshaft with the clutch nut removal tool.
- 3. Attach the Universal Puller. There are three 6mm clutch puller holes located on the ends of the center hub. (figures 30 & 31)

CAUTION:

Do not use a jaw type puller or use the 6mm tapped holes as jackscrews or you are likely damage the clutch or drum.

4. If necessary apply heat to the center clutch hub.

CAUTION:

Do not heat the crankshaft threads or the aluminum shoes.

5. Keep tension on the puller as you are heating it.

A WARNING

The clutch will often pop off under tension from the puller and it will be very hot.

CLUTCH WASHER STACKUPS:

Once the clutch is removed, and cool to touch, carefully put it into a vice and remove the center shoulder bolt out of each clutch shoe. You may have to heat the center hub again to remove the bolts. Once you get a bolt loosened, carefully remove it with the shoe and observe the way the spring washers are stacked. Clean the washers and bolt if you intend to reuse.

The spring stacks in your Cobra clutch will contain 11 individual springs and flat washer(s) configured as a 5 ½ stack. See figure 32. This clutch is designed such that it reconfigured by the customer to achieve different clutch engagements 'hits' by changing washer counts and configurations.

CAUTION:

Generally reassemble the springs as you removed them from the engine or as you received them from Cobra. If you are unsure call the Cobra Technical Support Group 517-437-9100, and consult the experts.

CLUTCH ASSEMBLY REFERENCE DRAWING				
REF#	REF # PART # DESCRIPTION			
1	CAMU0013	Set of three shoes, springs, bolts, flat washers & nuts		
2	CAMU0010	Set Of three springs, washers, bolts & nuts		

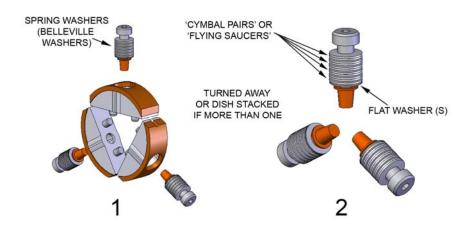


Figure 32 Some configuration of clutch spring stack. Each 'spring' stack contains multiple springs (Belleville washers) - arranged into three, four, or five 'flying saucers', or turned away against the flat washer(s). Shown is the 4 ½ stack..

Stack	Total Springs	Flying Saucers or Cymbal Pairs	Turned Away or Dish Stacked	Std. Flat Washer(s)
5 ½	11	5	1	VARIED

Clutch adjustment washers

Your Cobra comes stock with flat washer(s) at the bottom of the spring washer stack. Cobra offers several thicknesses of thin adjustment washers that allow clutch engagement tuning. Increasing the flat washer(s) thickness increases the engine speed for clutch engagement thus increasing the abruptness of clutch engagement (harder hit). Conversely, decreasing the flat washer(s) thickness decreases the engine speed for clutch engagement thus decreasing the abruptness of clutch engagement (softer hit).

Part #	Thickness mm (inch)	
HKCSM015	1.5 (0.060)	
HKCSM012	1.2 (0.047)	
HKCSM008	0.8 (0.031)	
HKCSM006	0.6 (0.025)	
HKCSM005	0.5 (0.020)	
HKCSM004	0.4 (0.015)	
HKCSM003	0.25 (0.010)	
HKCSM001	0.12 (0.005)	
HKAM0022	CLUTCH SHIM KIT	

Use the table above to order adjustment washers. Replace the stock washer with the proper combination of adjustment washers that delivers the desired clutch hit.

CAUTION:

It is easy to prematurely damage the clutch and other engine components with improper clutch adjustment. If you are unsure of how to adjust the clutch, contact the Cobra Technical Support Group before making adjustments.

Clutch shoe wear:

- If the clutch has been slipping and shows signs of glazing, it is best to replace the shoes. We have found that once the shoes are glazed, even if deglazed with emery paper or a file, the performance is reduced.
- The best way to prevent glazing is by not gearing too high, changing the oil as specified and by not blipping the throttle. Every time you blip the throttle, you are working your clutch springs.

CAUTION:

The clutch produces a tremendous amount of heat and when a rider is blipping the throttle. This makes the clutch and clutch springs wear out quicker. This also makes your engine tend to run hotter which decreases engine power. It is important to train your rider **NOT** to be a **throttle 'blipper'**.

CAUTION:

Sludge build-up between the spring washers also keeps the clutch shoe from engaging fully and this will cause the clutch to start to slip. So you will need to clean the sludge out or just replace the spring washers and bolts with new ones. How quickly this sludge builds up depends on how often you **change your oil** and whether your rider is a throttle 'blipper'.

REF#	PART NO.	DESCRIPTION
1	ECMU0118	Crank seal
2	ECMU0040	Clutch to hub spacer (standard 0.030" 0.76mm)
	ECMU0040T	Clutch to hub spacer (thin, 0.015" 0.38mm)
3	ECMU0119	Needle bearing
4	ECMU0120	Clutch basket with bearing
5	CAMU0005	Clutch Complete w/ Arbor
6	ECMU0018	Clutch nut
	CCMU0029	Clutch arbor

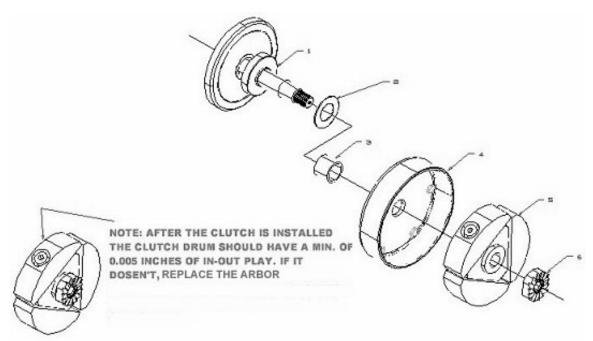


Figure 33, Clutch Assembly Drawing

Clutch Assembly:

1. After cleaning or replacing the spring washers, reassemble the stack up of washers.

CAUTION:

It is also important that all three shoes are stacked the same. (See figure 32)

- 2. Clean the threads of the stack bolt and the clutch with brake cleaner removing all old thread locking material.
- 3. Apply high strength thread lock material to the stack bolt and tighten to 12 ft-lb (16 N-m).

CAUTION:

Avoid allowing excess thread lock material to contact the spring washers and the clutch or the clutch is likely to malfunction.

- 4. Clean the center hole of the clutch and on the tapered section of the crankshaft.
- 5. Apply a small amount of wicking / bearing retainer (green) thread lock agent to the center tapered section of the crankshaft and taper of clutch arbor.

CAUTION:

Lean the bike / engine such that any excess thread lock agent goes away from the bushing in the clutch drum.

- 6. Put the clutch back in.
- 7. Apply high strength thread locking agent to the threads and install the nut and torque to 40 ft-lb (54Nm) with the special socket (see figure 33).

CAUTION:

Use high strength (red) thread locker on the threads of the clutch nut. If you are using an impact socket, just zap it lightly with an air wrench to tighten it because there are only about 4 threads inside the nut and they can be easily stripped. If you are tightening it by hand, you can hold the crank from turning with the clutch removal spanner ECMU0082.

Install the clutch cover tightening the bolts from inside out. (8 or 10 mm socket, 5.8 ft-lb, 7.8 Nm).

INSPECTION NOTE:

- There must be in / out play in installed clutch, 0.4mm to 1.0 mm (0.015" to 0.040").
- Excess in/out will cause early crank seal failure.
- A blue clutch drum is worn out from excessive slippage or improper lubrication.

NOTE: To ensure proper engagement of the kick gear with the starter nut, tighten the six screws only to the point of being not extremely loose. Using one hand rotate the kick lever to ½ stroke and hold while tightening the six screws completely with the other hand.

Fill with oil (235 ml (8.0 oz) Cobra 3 Shoe Clutch Milk (Part # MCMUGF32).

Ignition

Stator care

Stator failure will result from running the bike hot. Following is a list of things that will make your engine run hot.

- 1. The timing should not exceed the maximum specifications listed.
- 2. Improper carburetor jetting.
- 3. Improper spark plug heat range. Never run a hotter plug than the specified spark plug.
- 4. Clutch slippage. See "CLUTCH" section for causes of slippage.

CAUTION:

- Because of the amount of heat generated by the clutch and engine during extended periods of riding, it is advisable to remove the ignition cover afterward to allow the ignition to cool off. The heat transfers through the cases and can damage the stator as it cools off because of lack of airflow around the stator.
- Ignition will overheat if the gap between the rotor and stator is not large enough. There should be even clearance as the rotor rotates relative to the stator.

- Non-resistor spark plug caps should be used. Resistor caps will result in a weaker spark that will reduce performance.
- Make sure connections are free of dirt.

The proper ignition timing for this model of is at **0.035**" before Top Dead Center (that means 0.035" before the piston reaches the highest point of it's travel in the cylinder).

CAUTION:

Advancing the ignition timing will cause the engine to run hotter, in-turn causing power loss, shortened clutch life, and possibly lead to premature stator failure, and can also cause detonation which can lead to premature piston and ring failure.

Tools recommended for timing service:

- Compact motorcycle dial indicator
- Universal clutch puller- a universal puller that pulls the clutch, main drive gear and rotor. (Part # MCMUTL70).

TIMING YOUR IGNITION:

- 1. Remove the spark plug.
- 2. Insert the dial indicator into the spark plug hole.
- 3. Remove the four bolts from the ignition cover.
- 4. Remove the water pump belt from the rotor and water pump shaft.
- 5. Turn the crankshaft counterclockwise until it reaches top dead center.
- 6. Set the dial indicator to zero
- 7. Turn the crankshaft clockwise until the dial indicator reaches 0.035" (0.9mm) from top dead center.
- 8. At this position the line on the rotator should align with the center of the stator coil at 5 o'clock position on stator frame. If not loosen the three 5mm bolts to adjust the stator.




Figure 26, Lining up the line on the rotor with the line on the stator.



Figure 27, Using a dial indicator to measure piston height for setting ignition timing.


ROTOR INSTALLATION:

- 1. Torque the nut on the rotor to 30 ft-lb (45 Nm) with high strength (red) thread locking agent.
- 2. Recheck the timing following the procedure of timing your ignition.
- 3. Install the water pump belt back on.
- 4. Bolt the ignition cover back on.
- 5. Put the spark plug back in, and firmly stick the spark plug cap onto the spark plug.

Cooling System

Radiator fluid removal:

Remove the coolant drain plug (13mm bolt) on the front of the engine cases.



NOTE: Inspect the old coolant for evidence of oil, combustion byproducts (black 'oil slick' stuff) or other things that may indicate a problem.

Tools recommended for impeller service:

- Flat head screwdriver
- 13mm- hex wrench
- 3mm hex key
- 4mm hex key
- 5mm hex key
- 8mm hex key
- Water Pump Installation tool

MCMUTL09, 2010 and newer JR & King MCMUTL08, 2009 and older JR models

- Slide hammer with
 - fitting to thread into threads on end of shaft (M5x1.0)
 - single and double hook ends for removing plastic impeller
- Dead blow hammer

COBRA IMPELLER SERVICE INSTRUCTIONS

1. Remove radiator cap and drain engine coolant as described above.

NOTE: If the impeller is damaged or broken completely back flush the coolant system to ensure no solid pieces are in the system.

- 2. Remove ignition cover using a 4mm hex key (four places)
- 3. Stick a 3mm hex key in the water pump shaft cross hole, and remove belt retainer screw using a 4mm hex key. (Figure 41 item 1)
- 4. Remove belt retainer, water pump belt and water pump fan pulley.
- 5. Remove bearing retainer screw using a 3mm hex key.
- 6. Thread a slide hammer onto the end of the water pump shaft and remove the assembly.



NOTE: It is quite common for the older plastic impellers to fall off the end of the shaft during this step of the process if that is the case, then follow the steps at the end of this section to remove the seal and impeller.

- 7. Clean any debris or particles from the bore and use some light emery cloth to remove any scratches in the surface that the removal process may have created.
- 8. Lubricate the bore with grease.
- 9. Prepare for assembly by installing the water pump assembly into the assembly tool and align the tool with engine case making sure alignment pin is in proper hole.



CAUTION:

Damage may occur if one attempts to install the water pump and the device is not orientated correctly. If the tool does not sit flat against the cases, the orientation of the tool to the engine is not correct. Make sure that the top alignment pin is in the 2nd unthreaded hole, the bottom alignment pin is also in the 2nd unthreaded hole, and that the relief for the stator bolt head is oriented toward the stator.

10. Hold the installation tool firmly against the engine case and tap on the end of the water pump shaft with a dead blow hammer until the insertion punch is needed



11. Continue driving the assembly with the punch until the head is flush.

NOTE: The insertion punch is 0.010" (0.25mm) longer than the housing so as to seat the water pump assembly just in from the case surface.

12. The assembly is installed properly when the retaining screw can be tightened and it does not cause a bind on the spinning shaft (use medium strength thread lock on the retainer screw).

NOTE: It may be necessary to tap the water pump shaft in (hammer) and out (with slide hammer) to insure proper free operation of the shaft.

- 13. Reinstall the pulley, belt and fan cover using a 3mm hex key to stop the rotation of the water pump assembly while tightening with medium strength thread lock to 10 ft-lb (14Nm).
- 14. Reinstall the cover

NOTE: Refill the coolant system with 50/50 antifreeze-coolant / distilled water.

CAUTION:

Do not mix Propylene Glycol based coolant / antifreeze solutions with Ethylene Glycol based coolant / antifreeze solutions.

Fuel & Air System

Carburetor

Tools recommended for carburetor service:

- Small flat head screwdriver
- WD-40
- 8mm socket

Your Cobra is equipped with an adjustable carburetor. Some fine-tuning may be needed according to weather condition and altitude. Proper jetting is **very** important for engine performance and engine life. Serious damage to the engine can occur if not properly adjusted.

IDLE ADJUSTMENT:

On the left side of the carburetor, there are two adjustment screws. The larger screw with the knurled head is the idle adjustment screw. To raise the idle, turn the screw in clockwise (in 1/4 turn increments) and rev the engine after each adjustment. To lower the idle, turn the screw counter-clockwise.

TOP END JETTING:

Indications that the engine is running too rich (too much fuel for the air) are:

- Engine not revving out or blubbering at high RPMs.
- Engine will not 'clean out'
- Wet or black spark plug

NOTE: Before changing jetting be sure that the air filter is properly cleaned and has the usual amount of air filter oil. An overly dirty air filter can cause the engine to run rich.

If the engine is running rich on the top end it should be leaned out. Leaning it out can be done by:

- 1. Changing the main jet to a smaller number.
- 2. Raising the needle clip (this lowers the jet needle) one notch at a time on the slide.

Indications that the engine is running too lean are:

- Engine cutting out on top end.
- Engine overheating and ultimately seizure.
- White spark plug

CAUTION:

It is much safer to operate the engine slightly rich as opposed to slightly lean. This is because an overly rich engine will just run poorly while an overly lean engine will seize, potentially causing an expensive top end rebuild and a DNF.

To richen the carburetor:

1. Change the main jet one number at a time (larger).

Lower the needle clip (raising the jet needle) one notch at a time until the engine starts to blubber on the top end, then move the clip back up one notch or until you get the blubber out.

FUEL MIXTURE SCREW

The smaller brass screw that is towards the front of the engine is a fuel mixture screw. This screw will also richen and lean your engine more on the bottom and mid-range. In warmer conditions, turn the screw in. In colder conditions, turn the screw out. Be sure to keep the carburetor very clean and make sure you don't have water or dirt in the carburetor bowl. Use automotive carburetor cleaner or WD-40 to clean the carburetor inside and out.

Cleaning the carburetor:

A WARNING

Clean the carburetor in a well-ventilated area, and take care that there is no spark or flame anywhere near the working area; this includes any appliance with a pilot light. Because of the danger of highly flammable liquids, do not use gasoline or low flash-point solvent to clean the carburetor.

- 1. Make sure the fuel is shut off and remove the carburetor
- 2. Remove the carburetor.
- 3. Drain the fuel from the carburetor.
- 4. Disassemble the carburetor.
- 5. Immerse all the metal parts in a carburetor cleaning solution.
- 6. After the parts are cleaned, dry them with compressed air.
- 7. Blow out the fuel passages with compressed air.
- 8. Assemble the carburetor
- 9. Install the carburetor onto the motorcycle.

CAUTION:

1. The motorcycle will only operate properly if the carburetor top is installed properly with the mounting screws, cable and choke knob oriented as shown in figure 34.

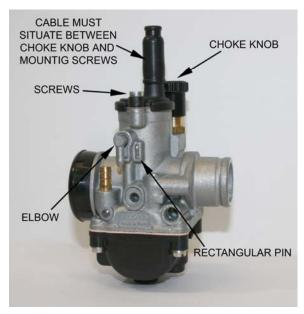


Figure 34 Proper carburetor top installation and location of rectangular slide indexing pin and vent elbows.

Reeds

- The reeds must lay flat on the reed cage.
- If the reed tips aren't lying flat, replace them immediately.
- The reeds must have a tight seal on the reed cage.
- If the reed is damaged in any way, replace it. This means cracks, chips, and ruptures. Anything abnormal, replace the reeds.

Take the reed cage out and hold it up to the light and look in through the cage. If you see light between the reed pedals and the frame, then replace the reeds. If you do not see light, then the reeds should be ok. (See figure 35)




Figure 35
The presence of light indicates that the reeds should be replaced, or possibly turned over.

Exhaust

The pipe is a crucial element to a motorcycle. Any kinks, dents, or damage done to the pipe will result in a major performance loss.

NOTE: Be sure to take the pipe off, and any carbon that may be built up. Carbon build up is created from exhaust. Exhaust has oils in it, and the oils cling to the walls of the inside of the pipe. Over a long period of time, the diameter of the pipe will decrease, due to carbon build up. So it is essential to clear the residue.

CAUTION:


It is important to repack the silencer. Signs of your silencer needing to be repacked are:

- The bike is louder than normal.
- A loss of power.

Wheels & Tires

Rear wheel pullers

Disassembly:

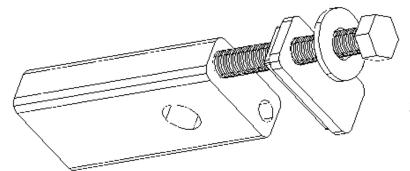

- Remove axle, and back wheel assembly.
- Pull the rear wheel pullers out of the back of the swing arm.

Figure 36

Rear wheel alignment:

Either

- Accurately measure the distance from the swingarm pivot to the axle center on each side or
- From the rear of the bike, sight up through both sprockets to ensure that the chain is running in a straight line (no bend in between or jog at either sprocket).

Tuning

Clutch

There are performance characteristics to observe and things to measure.

- 1) Performance characteristics to observe
 - a) Clutch coming in too late
 - i) Engine rev's to a high RPM before moving the motorcycle
 - ii) Clutch never fully engages on a reasonable straight stretch
 - iii) Basket turns blue in short amount of time
 - b) Clutch coming in too early
 - i) Motorcycle moves too soon when accelerating off idle
 - ii) Motorcycle moves but not with much power
 - iii) Clutch fully engages before the 'power band' kicks in
- 2) Things to measure that can have an effect
 - a) Spring washer configuration
 - b) Spring stack without flat washer
 - c) Thickness of flat washer
 - d) Individual spring washer thickness
 - e) Individual spring washer height
 - f) Effective bolt shoulder length
- Shoe thickness (difficult to measure accurately can only be approximated by the size of the step where it sticks out of the basket)
- Basket has worn and is too large

There is a relationship between observed characteristics and the things that can be measured

If a clutch comes in **too early**, it means that clutch <u>spring stack is **not providing**</u> **enough force** to keep the shoes from being thrown out to the clutch basket at the <u>proper time with the given shoes, basket, arbor, and bolt.</u> This can be due to:

- i) Clutch spring stack is to short
 - (1) Wrong configuration
 - (2) Sacked out (over stressed) washers
 - (3) Too thin a flat shim in the stack
- ii) Spring rate too low (wrong configuration with proper stack height)
- iii) Clutch arbor shoulder bolt is too long

If a clutch comes in **too late**, it means that clutch <u>spring stack</u> is <u>providing too</u> <u>much force</u> to keep the shoes from being thrown out to the clutch basket at the proper time with the given shoes, basket, arbor, and bolt. This can be due to:

- i) Clutch spring stack to tall
 - (1) Wrong configuration
 - (2) Too thick a flat shim in the stack
- ii) Spring rate too high (wrong configuration with proper stack height)
- iii) Clutch arbor shoulder bolt is too short
- iv) Clutch shoe material has worn too thin
- v) Clutch basket has worn too much and is too large of a diameter

With the exceptions of component failures, generally two things will occur:

- 1) The clutch shoes will wear causing the clutch to engage later, and
- 2) The springs will sack causing the clutch to engage earlier.

Typically the springs will sack at a quicker rate than the shoes will wear, meaning that an un-tampered clutch that worked fine will ultimately hit too early at some time. When this occurs it is easily remedied with a new spring stack **or** a thicker flat shim. Because the shoes have worn, a thinner flat washer may be needed with the fresh new springs to allow proper clutch engagement.

One thing to remember:

If your clutch is hitting fine, don't mess with it!

Some things to remember to aid clutch life

- Change oil each ride
- Gear to the low side
- Avoid mud if possible
- (Cut mud practice to 1 lap or none)
- Stay on the gas (no throttle blipping)
- Run more air pressure to allow wheels to spin (helps throttle steer)

- Make sure wheels spin freely (no bent rotors, dragging brakes, chain too tight, etc...)
- Make sure the engines pulls cleanly and strong by having properly maintained engine with correct ignition timing and carburetion.

Also refer to the *Clutch Service* section of this manual for more information on proper clutch care.

Gearing

For a bike with a centrifugal clutch, it's better to be geared too low than too high.

What happens with improper gearing?

- Poor performance
- Not enough top end speed
- No snap
- Over heat clutch
- Premature failure of engine seals, bearings, & electronics
- High clutch wear

Condition	Gear Taller	Gear Lower
Mud		V V
Sand		٧
Hills		¥
Hard Pack	\	
Throttle Blipper (novice)*	\	

^{*}It may be helpful to set up the clutch to hit early for smooth power delivery

Fi	Front Sprocket		Rear Sprocket	Gear Ratio
		15	33	2.20
		15	34	2.27
		15	35	2.33
	14		33	2.36
		15	36	2.40
	14		34	2.43
		15	37	2.47
	14		35	2.50
		15	38	2.53
13			33	2.54
	14		36	2.57

_	_			
		15	39	2.60
13			34	2.62
	14		37	2.64
		15	40	2.67
13			35	2.69
	14	stock	38	2.71
		15	41	2.73
13			36	2.77
	14		39	2.79
		15	42	2.80
13			37	2.85
	14		40	2.86
13			38	2.92
	14		41	2.93
13			39	3.00
	14		42	3.00
13			40	3.08
13			41	3.15
13			42	3.23
Ratio Write © Cobra R&D 2004				

Suspension

Adjustment:

- 1. Front forks
 - 1.1. Fork oil
 - 1.1.1. Oil type
 - 1.1.1.1. Heavier weight oil more damping slower responding
 - 1.1.1.2. Lighter weight oil – less damping – quicker responding
 - 1.1.2. Oil quantity / level
 - 1.1.2.1. Greater quantity / higher level greater bottoming resistance, stiffer near the end of the travel.
 - Smaller quantity / lower level less bottoming resistance, less 1.1.2.2. stiff near the end of the travel.
 - 1.2. Fork spring (optional spring)
 - 1.2.1. Stiffer spring (higher spring rate) stiffer throughout the travel.
 - 1.2.2. Less stiff spring (lower spring rate) less stiff throughout the travel.
 - 1.3. Fork height
 - 1.3.1. Rise in clamps for quicker turning.
 - 1.3.2. Lower in clamps for improved straight line stability.
- 2. Rear shock
 - 2.1. Shock spring (optional spring)
 - 2.1.1. Stiffer spring stiffer throughout the travel.
 - 2.1.2. Less stiff spring less stiff throughout the travel.
 - 2.2. Compression damping (optional valve)
 - 2.2.1. Harder (more damping, slower) adds resistance to the suspension motion when the suspension is compressing.
 - 2.2.2. Softer (less damping, quicker) reduces resistance to the suspension motion when the suspension is compressing.

- 2.3. Rebound damping (optional valve)
 - 2.3.1. Harder (more damping, slower) adds resistance to the suspension motion when the suspension is returning to full length.
 - 2.3.2. Softer (less damping, quicker) reduces resistance to the suspension motion when the suspension is returning to full length

Front Forks Bottoming Too Frequently

Fork oil level

If the front forks bottom harshly more than a couple of times per lap and the fork springs are proper for the weight of rider (as detailed above), try raising the fork oil level in increments of 10mm. Raising the fork oil level, reduces the air volume, and increases the stiffness of the forks late in the travel, thus adding a progressive' feel.

Front forks feel too stiff over small bumps.

Fork oil weight

If the forks feel too stiff over small bumps try decreasing the weight (increasing the viscosity) of the fork oil.

Rear suspension troubleshooting.

Damping

Always start with standard settings and make damping changes in no more than two click increments and only make one change at a time.

Symptom	Action	
Rear end feels stiff on small bumps	Softer compression damping	
Rear end 'sways' on straights	Harder compression damping	
Bike tends to jump 'rear end high'	Harder rebound damping	
Bike tends to jump 'rear end low'	Softer rebound damping	
Frequent rear end bottoming	Harder compression damping	
Bottoms after end of continuous bumps	Softer rebound damping	
Rear end 'kicks' over square edge bumps	1) Harder rebound, 2) Softer Compression	

Proactive Suspension Adjustments

Once you have the suspension adjusted for decent overall feel, you can make proactive adjustments when faced with different racing conditions.

Situation	Actions
Sand track	Lower the rear end (increase race sag).
Sand track	Stiffer compression and rebound damping.
Long fast track	Lower the forks in the clamps by 3 mm.
Tight slow track	Raise the forks in the clamps by 3 mm.
Mud track	Lower the bike if the rider has difficulties touching the ground.

Rear shock

The rear shock on your Cobra is adjustable to your riders weight and riding style by changing the spring rate (stiffness) of the spring and / or by changing the damping valves.

Due to the complexities of the shock absorber internals, Cobra recommends that you either send the shock back to us for damping valve changes or send the shock to a competent suspension specialist such as PR².

Cobra offers stiffer and softer shock springs depending on the weight of your rider. See the Parts Shock section or the Optional component section at the beginning of the manual for these other components.

Front Forks

Cobra offers stiffer and softer fork springs depending on the weight of your rider. See the Parts Shock section or the Optional component section at the beginning of the manual for these other components.

The front forks are designed with the damping components in separate fork legs. The **compression damping** duties are performed in the **right fork leg** and the **rebound damping** duties are performed in the **left fork leg**. This allows easy adjustment of the damping characteristics by appropriately changing the viscosity of the fork oil in the fork leg controlling the damping characteristic that needs changed.

Example: if stiffer compression damping is required, switch from 20 (standard) weight fork oil to 25 or 30 weight oil in the right leg. If softer rebound damping is desired, switch from 20 (standard) to 15 or 10 weight fork oil in the left leg.

NOTE: Fork oil level affects bottoming harshness, and oil viscosity affects valving speed.

Carburetion

Although your Cobra is sent from the factory with the carburetor jetted for optimal performance, you may find it necessary to adjustment your particular jetting due to current weather conditions, altitude, fuel variations, and/or engine modifications.

CAUTION:

Proper jetting is very important for engine performance and engine life. Symptoms of improper jetting are listed below.

- Symptoms of incorrect oil or oil / fuel ratio
 - o Poor acceleration
 - Misfire at low engine speeds
 - Excessive smoke

- Spark plug fouling
- Excessive black oil dripping from exhaust system
- Symptoms of too rich a fuel mixture
 - Poor acceleration
 - Engine will not 'rev' out, blubbers on top
 - Misfire at low engine speeds
 - Excessive smoke
 - Spark plug fouling
 - Wet, black, or overly dark spark plug (when removed for inspection)
- Symptoms of too lean a fuel mixture
 - Pinging or rattling
 - o Erratic acceleration
 - Same actions as running out of fuel
 - High engine temperature
 - White spark plug (when removed for inspection)

NOTE: When inspecting the spark plug to evaluate jetting, a properly jetted machine will produce a spark plug that is dry and light tan in color.


Environmental and altitude related mixture adjustments					
Condition	Mixture will be	Required adjustment			
Cold air	Leaner	Richer			
Warm air	Richer	Leaner			
Dry air	Leaner	Richer			
Very humid air	Richer	Leaner			
Low altitude	Standard	None			
High altitude	Richer	Leaner			
Low barometric pressure	Richer	Leaner			
High barometric pressure	Leaner	Richer			

NOTE: Before making any carburetor jetting changes verify that:

- You are using the proper fuel and oil
- The fuel is fresh and uncontaminated
- o The oil and fuel have been mixed in the proper ratio
- The carburetor is clean (no plugged jets)
- The air filter is properly clean and oiled
- The float height is within proper specification (proper measuring technique is described later in this section)

NOTE: Perform all jetting changes on a motorcycle that has been warmed up to proper operating temperature.

The carburetor on your Cobra motorcycle is quite adjustable. Figure 59 shows its range of adjustment and in particular what adjustable component affects what range of operation (specifically throttle position).



FUEL SCREW ADJUSTMENT:

Adjust for maximum idle speed

The fuel adjustment screw is located on the left side of the carburetor. It is the smaller of the two adjustment screws and requires the use of a small flat blade screwdriver for adjustment. After adjusting for maximum idle speed, use the idle screw to adjust the desired idle speed.

NOTE: If the fuel screw requires more than 3 turns out, replace the pilot jet for one that is one size richer (larger number) then re-adjust the fuel screw.

IDLE ADJUSTMENT:

Adjust for desired idle speed

The idle speed screw is located on the left side of the carburetor. It is the larger of the two screws on the side of the carburetor and is unique with its knurled head for easy fingertip adjustment. To raise the idle, turn the screw in, clockwise, (in 1/4 turn increments) and rev the engine after each adjustment. To lower the idle, turn the screw counter-clockwise.

TOP END JETTING: Adjust for clean full throttle acceleration

Jet your top end (main jet) based on the acceleration of your Cobra Motorcycle on the longest straight at the track. Observe any of the lean or rich symptoms (spark plug appearance and bike performance) listed above and change your jetting accordingly.

PART THROTTLE

Adjust for desired acceleration

Using an area of the track that allows the rider to operate and mid throttle and transition (accelerate, or 'roll on') from closed, or mostly closed throttle, to a larger throttle opening. Observe the rich and lean symptoms listed above. Adjust the jet needle position by moving the clip from its current position (move the clip higher on the needle to make the bike run leaner, or move the clip lower on the needle to make the bike run richer) to one higher or lower.

Troubleshooting

1) Engine not behaving properly

- a) Carburetor top is installed backwards (happens a lot)
- b) The carburetor slide indexing pin is missing
- c) Wrong spark plug installed (8339 Champion to be used on '04 or later & no mods)
- d) Needle clip is on top of plastic not below
- e) Air leak find where with carb cleaner or similar
- f) Ground wire or ignition leads have fault

2) Engine is down on power

- a) Clutch engagement is not set properly
- b) Jetting is incorrect
- c) Silencer needs repacked
- d) Exhaust pipe
 - i) Has excess carbon buildup
 - ii) Has large dent in it
- e) Compression is low
 - i) Piston
 - ii) Rings
- f) Reeds are damaged
- g) Ignition timing is incorrect

3) Engine is excessively loud

a) Silencer needs to be repacked

4) Engine cuts out at high RPMs

- a) Stator bad
- b) Carburetor diffuser plate upside down (install like a skirt)
- c) Plugged fuel petcock
- d) Silencer core tube broken

5) Engine won't start

- a) Fuel
 - i) None in tank
 - ii) Is sour or bad
- b) Carburetor is dirty
- c) Ignition
 - i) Spark plug fouled

- ii) Wrong spark plug installed (8339 Champion to be used on '04 or later & no mods)
- iii) Spark plug cap off
- iv) Engine Shut-off 'kill' switch is shorted
- v) Bad electrical ground
- vi) Stator winding damaged
- d) Exhaust is plugged

6) Overheating

- a) Bad stator
- b) Water pump pulleys or belt broken
- c) Water pump impeller broken or bolt out
- d) Jetting too lean
- e) Too much throttle blipping
- f) Too high gearing
- g) Kinked radiator hose
- h) Rear brake dragging
- i) Chain too tight
- j) Air leak

7) Engine won't idle

- a) Idle knob needs adjusted
- b) Air leak
- c) Carburetor jets are dirty

<u>Index</u>

Air Filter Maintenance11	Parts24
Airbox	Frame Parts28
Parts14	Frictional Drive13
Bars and Controls15	Front Brake
Base Gasket Selection38	Parts30
Break-In6	Front Forks
Carburetor	Service63
Parts16	Front Forks:63
Service55	Front Wheel Parts31
Specifications4	Fuel System
Tuning 64	Service55
CFD Cobra Frictional Drive13	Gearing60
Chain	Hardware and Fasteners
Adjustment11	Frame28
Chassis	Plastic32
Specification4	Ignition
Clutch	Parts21
Parts20	Timing51
Clutch Lubricant	Jetting
Replacing10	How To55
Compression test38	Stock4
Cooling System52	Troubleshooting64
Electrical	Lubrication
Parts18	Recommended4
Engine	Maintenance
Specifications4	Schedule8
Exhaust58	Tips8
Parts23	Oil
Fork Oil	Recommended4
Replacement12	Optional Components5
Forks	Parts

Airbox and Filter14	Parts	34
Bars and Controls15	Pullers	58
Bottom End & Transmission 19	Reeds	57
Carburetor16	Shock	63
Clutch & Kick Starter20	Parts	35
Coolant System17	Service	66
Electrical18	Slip Clutch	13
Engine19	Spark Plug	
Exhaust23	Recommended	4
Forks24	Specifications	4
Frame28	torque values	5
Front Brake30	Starting	7
Front Wheel31	Suspension	66
Ignition & Water Pump21	Swingarm Parts	36
Inlet14	Top End	
Plastic & Seat32	Parts	22
Rear Brake 33	Service	37
Rear shock63	Torque Values	5
Rear Wheel34	Transmission	
Shock35	Specifications	4
Swingarm36	Transmission Lubricant	
Top End22	Replacing	10
Triple Clamps24	Troubleshooting	66
Parts List	Jetting	64
Front Forks63	VIN reading	8
Plastic & Seat Parts32	WARNING	1
Pullers58	Water Pump	
Rear Brake	Parts	21
Parts33	Wheels	
Rear Wheel	Service	58